
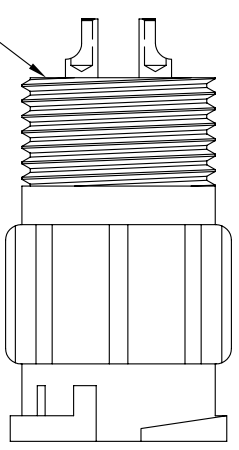





REV.	ECON. NO.	DATE	SIGN	DESCRIPTION

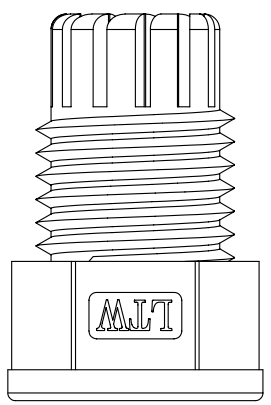

③


②

①




⑤

④

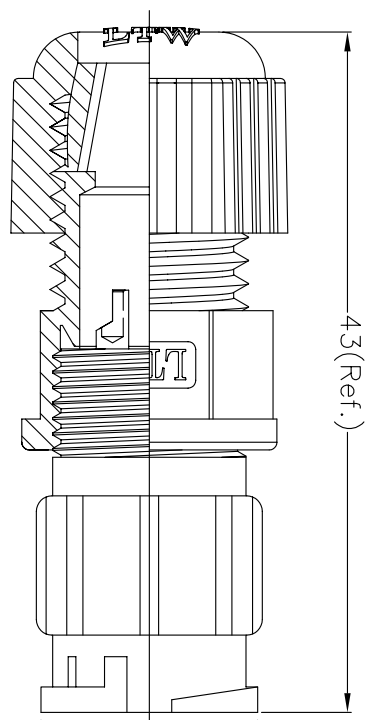

ø14.00



Pin Assignments
Front View 前視圖

Note:
 1. Seals for Cable OD:ø4.5mm~ø6.5mm
 (防水墊圈線徑: ø4.5mm~ø6.5mm)
 2. One Set Unassembled in One PE Bag
 (每一組未組裝, 放置於一個 PE 袋, 并封口)
 3.@@ Important Dimension
 (@@ 為重點檢驗尺寸)

NO.	NAME	COLOR	SPECIFICATION	QTY	NOTE
6	PE Bag			1	HPE00900085
5	Sealing Nut	Black	Nylon	1	ANCC223XXX01
4	Seals	Black	EPDM	1	DGA0064EP70
3	Clamp Ring	Black	Nylon	1	ANCC224XXX01
2	Gasket	Black	EPDM	1	DGA0063EP70
1	Connector	Black	4Pin Male,Nylon+GF	1	ZSE00100693

UNIT:mm		TITLE	4Pin Male Connector Female Pin for Field Installation,Lock Type
TOLERANCE		SCALE	Free
.X .XX .XXX	±0.25 ±0.1 ±0.05	REV.	A
ANGLES	±1°	SIZE	A4
		SHEET	1 OF 1
		@@	Inspection Item

LTW
亮泰企業股份有限公司

ITEM NO	LTWBD-04BMFA-LL7001	DRAWN BY	XMLM	DATE	2006/01/27
DWG. NO	LTWBD-04BMFA-LL7001	CHECKED BY	Wu Dong	DATE	2006/01/27
CUSTOMER		APPROVED BY	MOX	DATE	2006/01/27