

## EPIC® H-A 3 AGSV

Innovative metal and plastic housing design  
Housing in plastic or metal version. For power supply in the smallest possible space



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

### Info

Lightweight chemically resistant plastic housing

### Application range

Machine and equipment manufacturing  
Control engineering  
Electronic laboratory

### Product features


Surface-mount base  
1 lever  
1 cable entry  
Versions with / without cable gland

### Technical Data

Material:	Housing: powder-coated zinc die-casting, grey Lever: zinc-plated steel Sealing: NBR Housing: grey thermoplastic, black Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40°C to +100°C, short-term up to +125°C
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770

### Note

Photographs are not to scale and do not represent detailed images of the respective products.

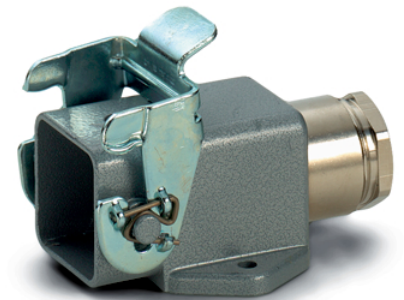



**EPIC® H-A 3 AGSV**

Part number	Article description	M	PG	Material	Colour	Cable gland	Cable clamping range	Dimensions incl. cable gland
H-A housing: surface-mount base								
10512700	H-A 3 MAgsv		11	Zinc die-casting	grey			51.5
10424000	H-A 3 Agsv		11	Thermoplastic	grey			56
10424500	H-A 3 MAgsv		11	Zinc die-casting	grey	yes	6,5 - 12	57.5
10424200	H-A 3 Agsv		11	Thermoplastic	grey	yes	6,5 - 12	65
19512700	H-A 3 MAgsv M20	20		Zinc die-casting	grey			54.5
19421900	H-A 3 Agsv M20	20		Thermoplastic	grey	yes	3 - 13,5	56
19424500	H-A 3 MAgsv M20	20		Zinc die-casting	grey	yes	3 - 13,5	60.5

**EPIC® H-A 3 AGSV**

