

EPIC® ULTRA H-B 24 TS QB

Housing H-B ULTRA: for higher functional reliability
Optimum, low-resistance 360° screening
All-purpose due to high corrosion resistance and high environmental protection.
Space-saving due to compact dimensions
Faster than any other comparable system
High mechanical resistance



Good chemical resistance



Wide clamping range



Assembly time



Optimum strain relief



Space requirement



Robust



Integrated SKINTOP® cable gland



Connector with standard housing unit



Interference signals



Waterproof

Info


EMC protection
Corrosion-resistant
SKINTOP® integrated cable gland

Application range

In EMC-sensitive environments
For fixed and flexible applications (e.g. machinery building, wind turbines)
Construction machinery
Electric motor manufacturing

Product features

Housings with the BRUSH addition come with BRUSH cable screen contacting
Pluggable with standard housings
Corrosion-resistant according to DIN EN 6988
Resistance to cyclic salt spray is tested according to IEC 68-2-52, severity level 2
Salt spray testing according to DIN EN ISO 9227, method NSS, period of test 480 hours

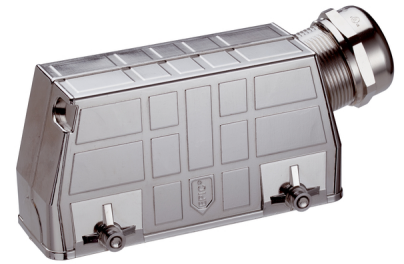

EPIC® ULTRA H-B 24 TS QB**Technical Data**

Material:	Housing: nickel-plated zinc die-casting Lever and bolts: stainless steel Sealing: NBR Cable gland Body: nickel-plated brass Insert: PA Seal: special elastomer
Protection rating:	IP 65
Temperature range:	-40°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.



EPIC® ULTRA H-B 24 TS QB

Part number	Article description	Clamping range in mm	Minimum Ø above braiding (mm)
H-B housing: hood (side cable entry, bolts for double lever)			
70250219	ULTRA H-B 24 TS QB 7-15	7 - 15	
70250220	ULTRA H-B 24 TS QB 11-21	11 - 21	
70250221	ULTRA H-B 24 TS QB 11-21 BRUSH	11 - 21	8

EPIC® ULTRA H-B 24 TS QB

