

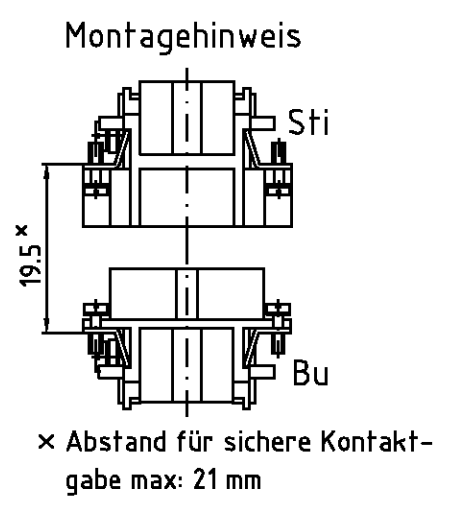
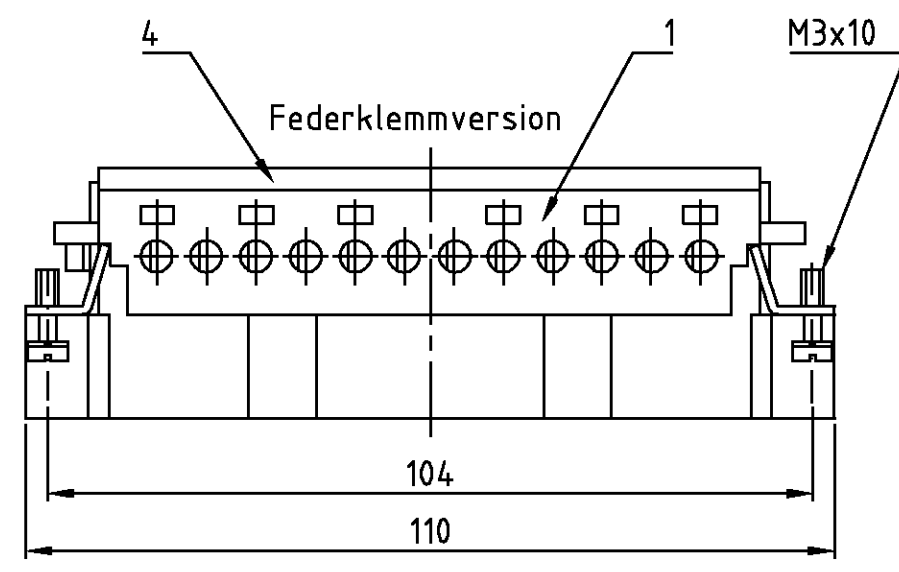
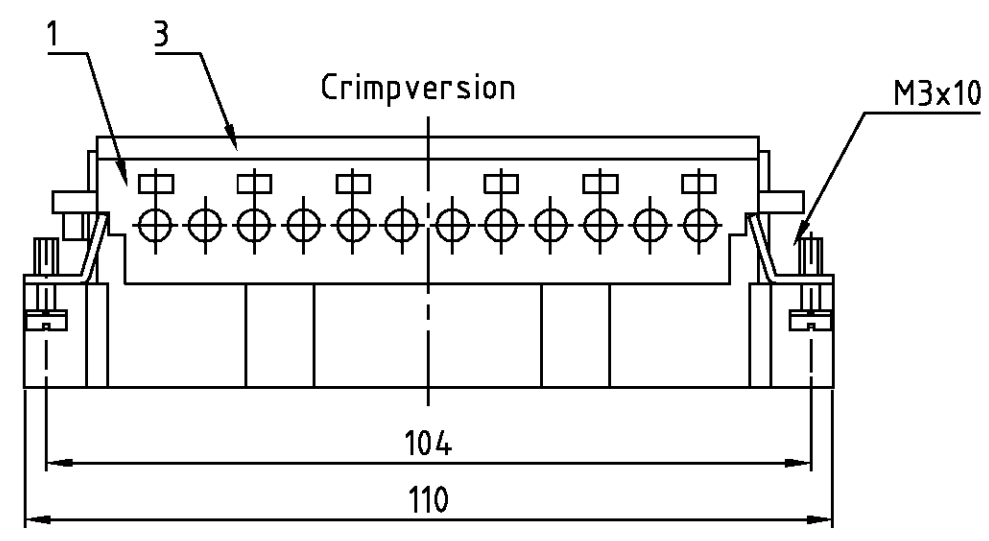
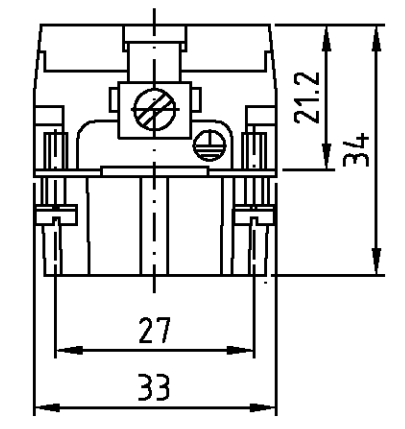
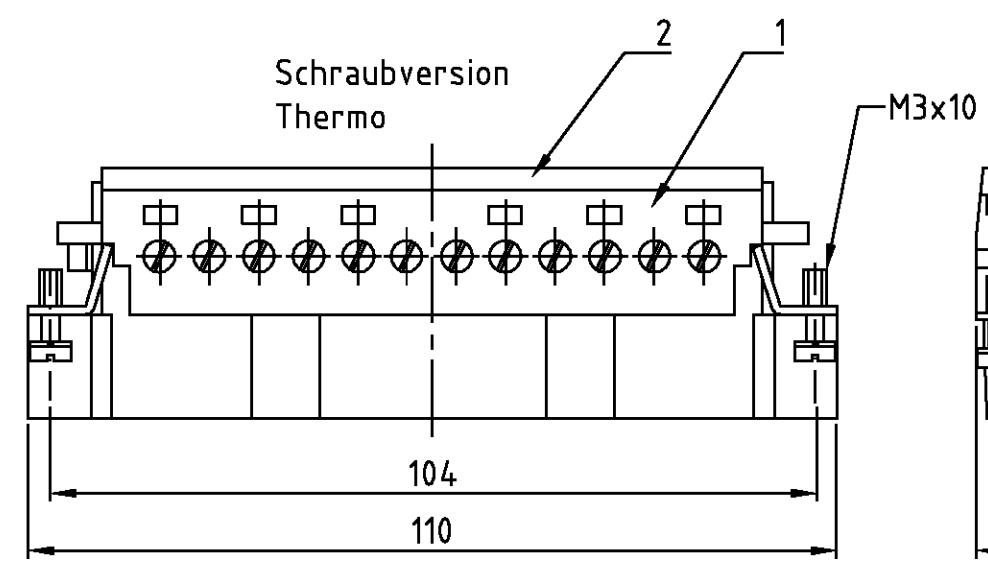
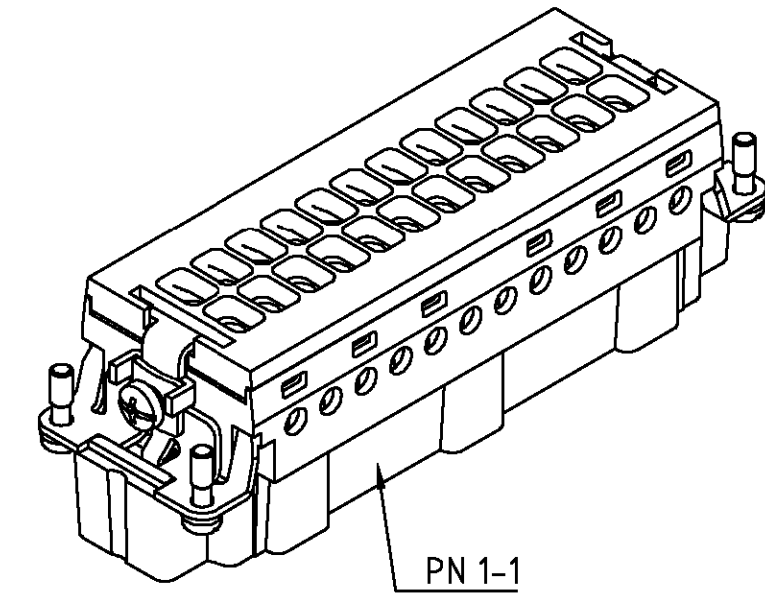


THIS DRAWING IS UNPUBLISHED. VERTRAULICHE UNVERÖFFENTLICHTE ZEICHNUNG. RELEASED FOR PUBLICATION FREI FUER VERÖFFENTLICHUNG. .2000. MATED WITH: PASSEND ZU: HE

LOC	DIST	P	LTR	REVISIONS	DATE	DWN	APVD
A1	-			AENDERUNGEN DESCRIPTION BESCHREIBUNG			
PROJEKT NR.:	A10			PN 0-1 und 1-2 neu; EGD0-0481-03	05.11.03	SR	SM




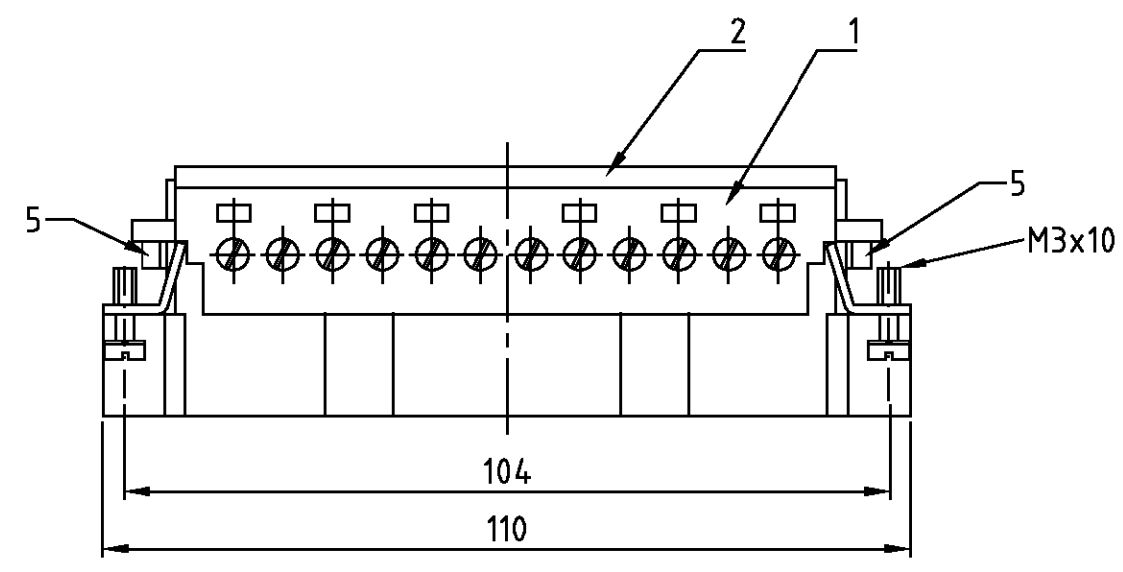


Kontaktanordnung Ansicht Anschlußseite
Contact arrangement view from termination side

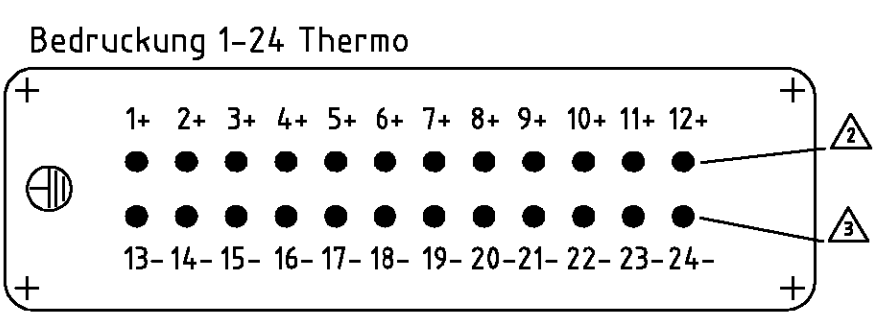

- Notes:
- Material: insert, PC
UL-File Nr.: E101788(R)
 - Finish: contact, Fe
 - Material contact: CuNi
Konstantan
 - Contact Surface: Silver, Gold
 - Strip length:
Screw connection 7mm
Spring clamp connection 10mm
Crimp connection 7.5mm
 - Material: cover PBT
UL-File Nr.: E69578
 - Special packaging

- Bemerkungen:
- Material: Einsatz: PC
UL-File Nr.: E101788(R)
 - Oberfläche: Kontakt, Fe
 - Material Kontakt: CuNi
Konstantan
 - Kontaktoberfläche: Silber, Gold
 - Abisolierlänge: Schraubanschluß 7mm
Federklemmanschluß 10mm
Crimpschluß 7.5mm
 - Material: Deckel PBT
UL-File Nr.: E69578
 - Sonderverpackung

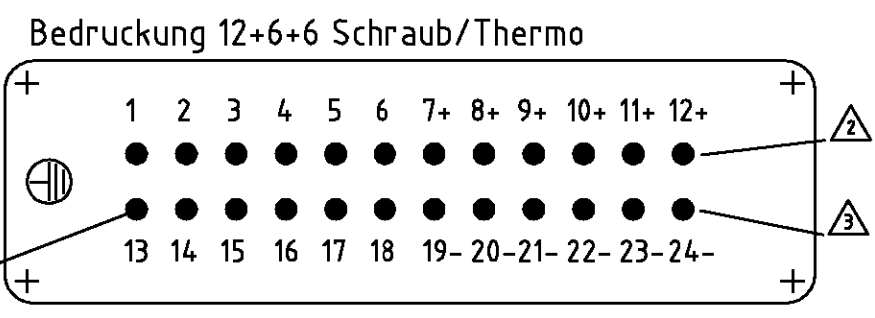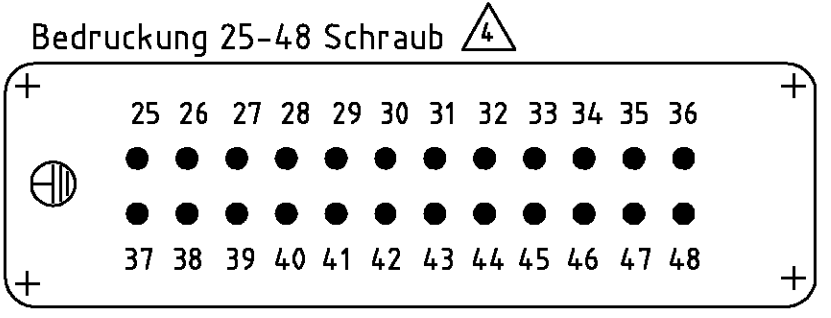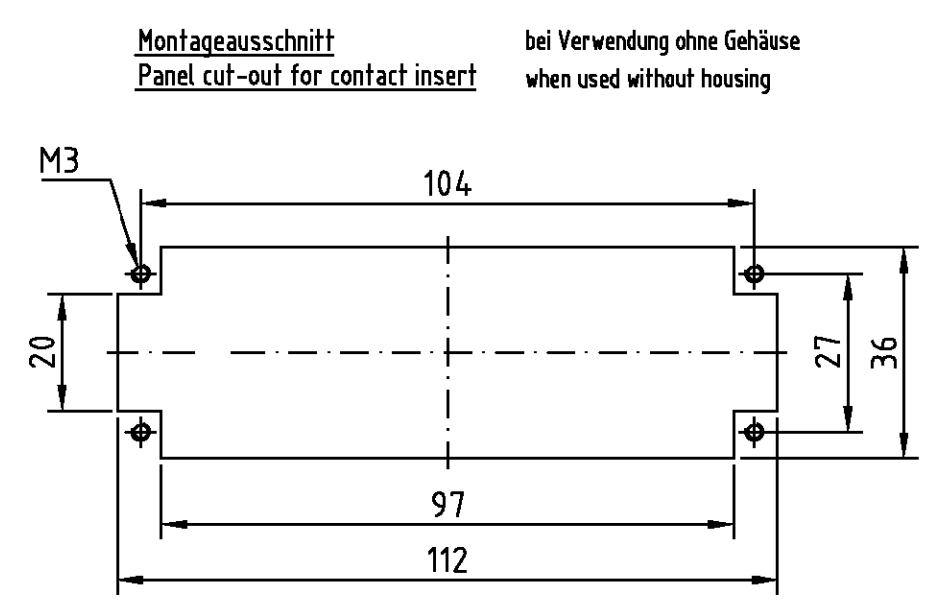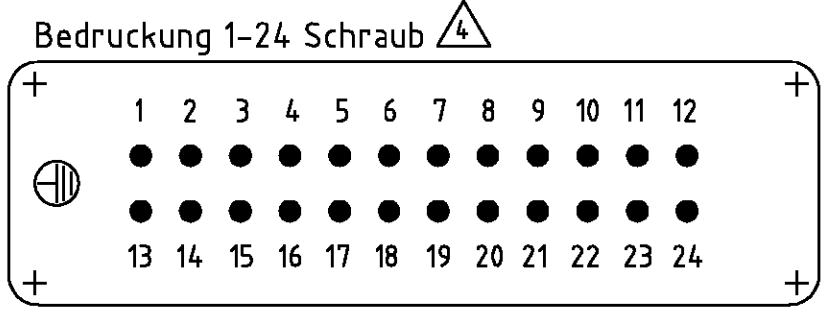

2										Zylinderschraube/cylinder screw	Stahl/steel	vernickelt/blau	5	M4x6				
	1									Deckel Federklemmversion/cover spring clamp version	△	lichtgrau/light grey	4					
										Deckel Crimpversion/cover crimp version	△	lichtgrau/light grey	3					
1	1									Deckel Schraubversion/cover screw version	△	lichtgrau/light grey	2					
1	1	1	1	1	1	1	1	1	1	Stifteinsatz/pin insert	△	lichtgrau/light grey	1					
1-2	0-1	9-3	1-8	9-5	9-4	7-9	7-12	2-9	1-9	1-7	1-1							
DESCRIPTION / BEKENNUNG											MATERIAL	COLOR / FARBE	ITEM NO. POS.	REMARKS / BEMERKUNGEN				
<p>THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. DIESER ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT. AENDERUNGEN DIE SICH TECHNISCH PARTIZIPANT DIESICH SIND VORHALTEN DEN JEWELLS LETZTSTUECKEN ADERANNESTAND ERFAHREN GE AMP ANNAHME.</p>											DWN Schneider 08.02.2000		HTS Elektrotechnik 53819 Neunkirchen, Germany					
<p>DIMENSIONS: DIMENSIONEN: mm</p> <p>TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN</p> <p>ISO 8015 ISO 2768 - mH - E DIN 16901 - 140</p> <p>ANGLES / WINKEL FINISH / OBERFLAECHE / FARBE</p>											CHK Schweiger 08.02.2000		AMP Male insert Stifteinsatz HE.24.STI					
MATERIAL											SIZE A2		CAGE CODE 00779		DRAWING NO. ZEICHNUNGS-NR. 1103640		RESTRICTED TO NUR FUER	
CUSTOMER DRAWING / KUNDENZEICHNUNG											SCALE MASSSTAB 1:1		SHEET BLATT 1 OF VON 1		REV A10			