
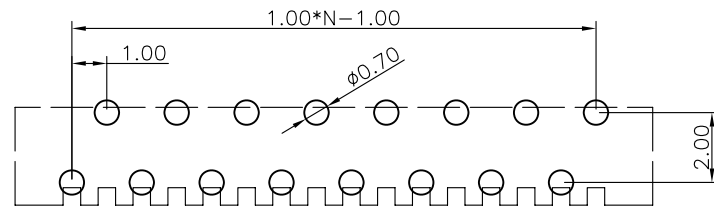
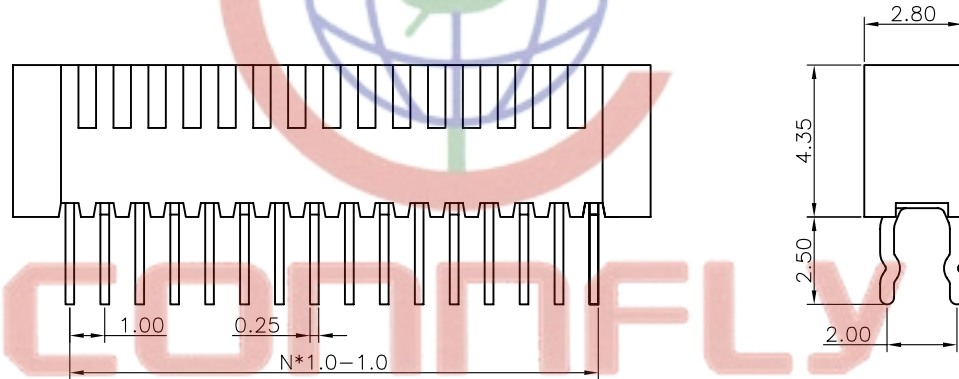


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	

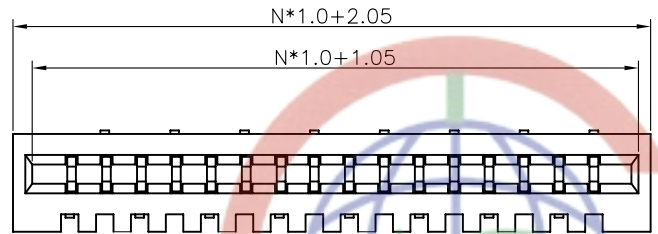

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE: -45°C~+110°C.
 - CONTACT RESISTANCE: 20mΩ max.
 - INSULATION RESISTANCE: 100MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 100V PER MINUTE.

3. PART NUMBER: DS1020-04

4. PRODUCT NUMBER CODE:

DS1020-04- X X X X
 CONTACT PLATING
 T1: TIN
 8: FULL GOLD FLASH
 MOUNTING TYPE
 V: V/T TYPE
 HOUSING COLOR
 B: BLACK
 No. OF CONTACTS
 02~27

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhenqin.com.cn

Http://www.zhenqin.com.cn

Add: West Kianglin Town Cixi Ningbo China

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.00mm FPC CONNECTOR
X.	±0.60	X.	±5°	UNITS	mm		V/T TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1020-04 SERIES
.XX	±0.25	.XX	±2°	DRAWING TYPE CUSTOMER			
SCALE		1:1	SHEET		1 OF 1		
DRAWING NO.		C-DS1020-04-XXXX					



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD