

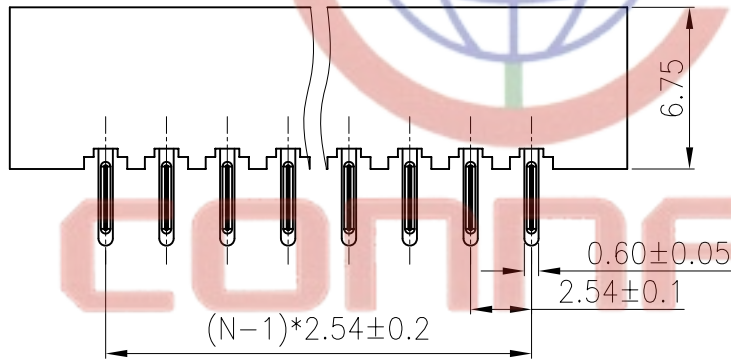



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 10/04/05'		

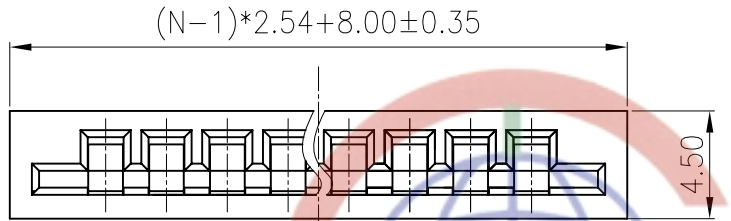

N:NUMBER OF CONTACTS




V/T TYPE



R/A TYPE

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE:-45°C~+110°C.
 - CONTACT RESISTANCE:20mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PART NUMBER: DS1020
- PRODUCT NUMBER CODE:
 DS1020- X X X X
 CONTACT TYPE
 D: Double side
 CONTACT PLATING
 T1: TIN
 MOUNTING TYPE
 S: V/T TYPE
 R: R/A TYPE
 No. OF CONTACTS
 02~27
 SERIES No.
 DS1020

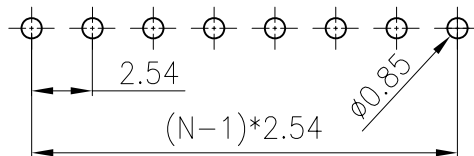

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)


Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhengjin.com.cn

Http://www.zhengjin.com.cn

Address: West Xizulin Town Cixi Ningbo China

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	FFC/FPC CONNECTOR
X. ±0.60	X. ±5°	mm		PITCH 2.54mm LIF.T/H
.X ±0.38	.X ±3°	A4	SERIES	DS1020 SERIES
.XX ±0.25	.XX ±2°			
DRAWING TYPE	CUSTOMER	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
SCALE	1:1 SHEET 1 OF 1			
DRAWING NO.	C-DS1020-XXXX			