

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 05/19/07'		

Table A:

Positions	A	B	C	D
10	17.16	10.16	10.60	7.62
14	22.24	15.24	10.60	7.62
16	24.78	17.78	10.60	7.62
18	27.32	20.32	10.60	7.62
20	29.86	22.86	10.60	7.62
24	34.94	27.94	18.18	15.24
28	40.02	33.02	18.18	15.24
40	55.26	48.26	18.18	15.24






NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - STORAGE TEMPERATURE:-20-70°C.
 - OPERATING TEMPERATURE:0-85°C.
 - CONTACT RESISTANCE:20mΩ max.(initial).
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.

3. PRODUCT NUMBER CODE:

DS1019 - X X X X X

- CONTACT POSITIONS
 - A: A TYPE
 - B: B TYPE
- CONTACT PLATING
 - Si: SELECTIVE GOLD FLASH
 - 8: FULL GOLD FLASH
 - 2: Gold + Nickel
 - T: Tin
- HOUSING COLOR
 - B: BLACK
- WIDTH
 - N: 7.62mm
 - W: 15.24mm
- No. OF CONTACTS
 - 10 14 16 18
 - 20 24 28 40

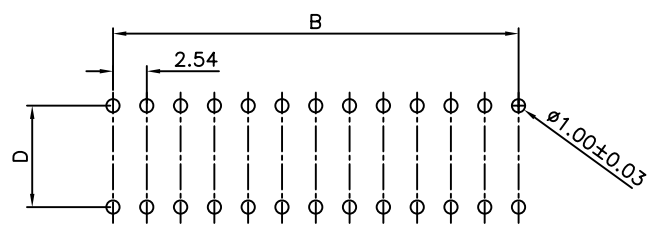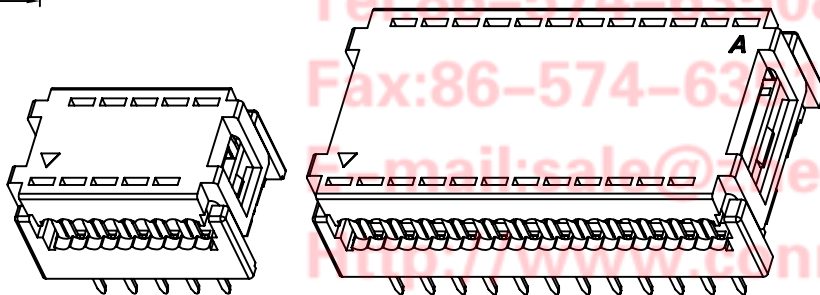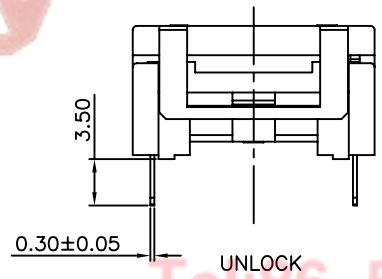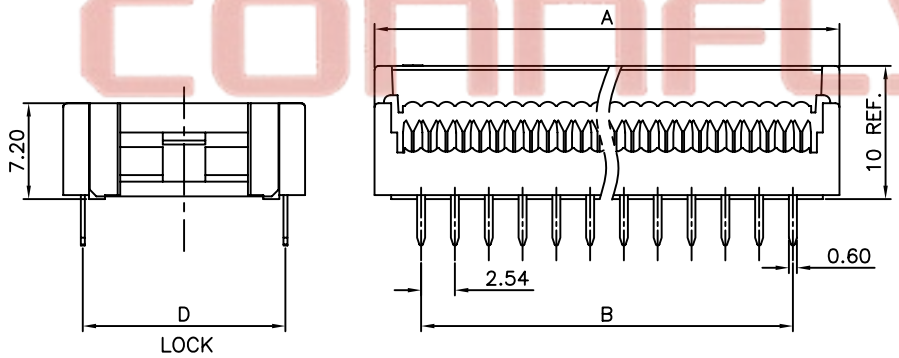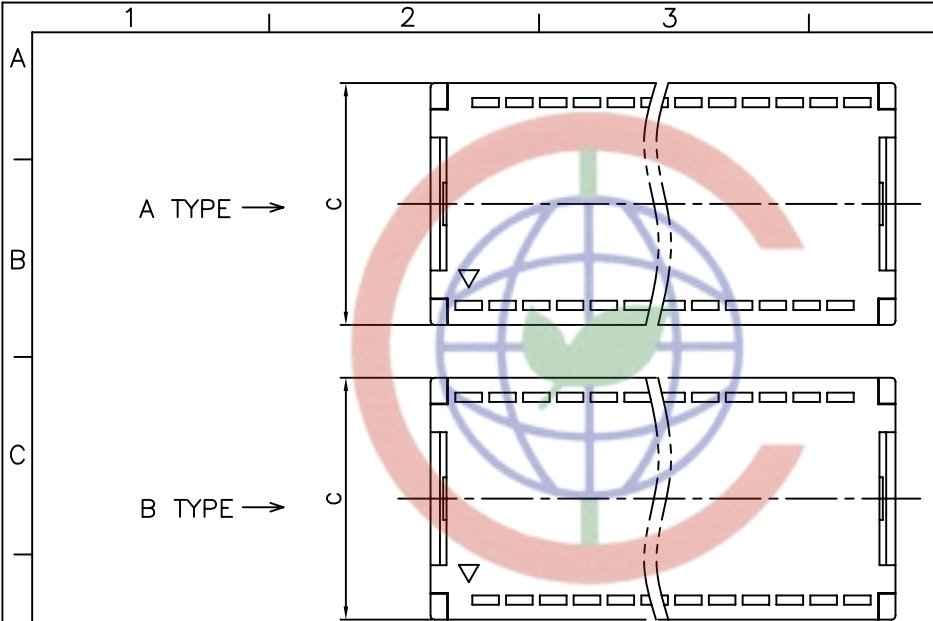

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	DIP PLUG CONNECTOR PITCH 2.54mm	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°		SHEET SIZE	A4	SERIES DS1019 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1019-XXXXX					
		SHEET		1 OF 1			