

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.0 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:300VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1031-14

4. PRODUCT NUMBER CODE:





DS1031-14 - X X X X

HOUSING COLOR  
B:BLACK

CONTACT PLATING  
8: FULL GOLD FLASH  
6: FULL TIN


MOUNTING TYPE  
S:SMT TYPE

No.OF CONTACTS  
06 ~ 40

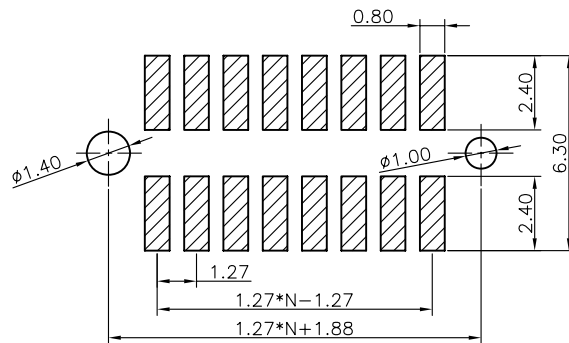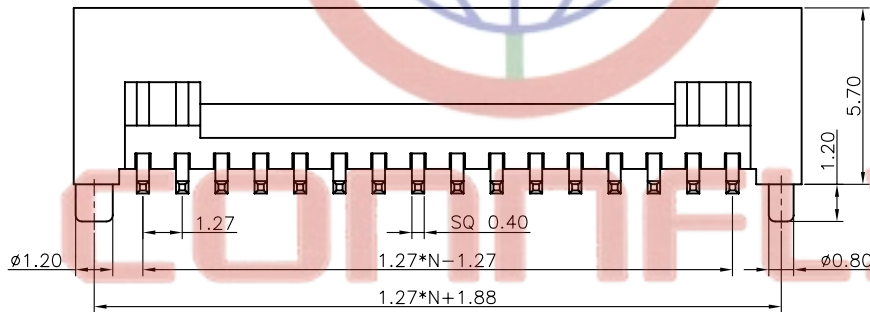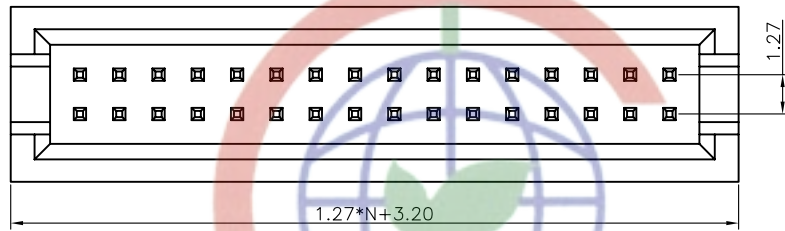

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	1.27mm HEADER PITCH SMT TYPE W/POST	
X.	±0.60	X.	±5°	mm	UNITS		
.X	±0.38	.X	±3°	A4	SHEET SIZE	SERIES	DS1031-14 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		 <b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1031-14-XXXXX					