
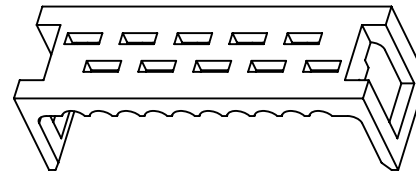
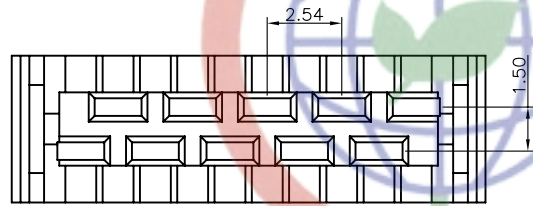


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/11/11'	~	

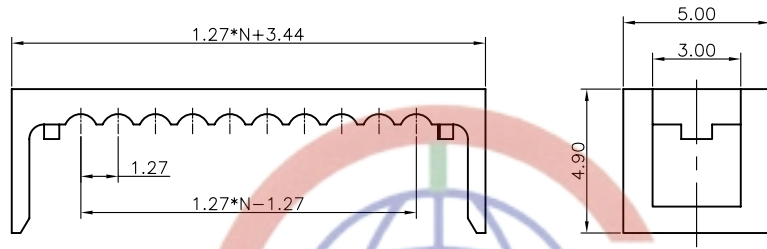

COVER

NOTES:



- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE RANGE:-40°C~+105°C.
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PRODUCT NUMBER CODE:

DS1015-01- X X X

CONTACT PLATING
 2: NICKEL + GOLD FLASH
 6: Full Tin
 8: Full GOLD FLASH

HOUSING COLOR
 R:RED

No. OF CONTACTS
 04 06 08 10 12
 14 16 18 20 24

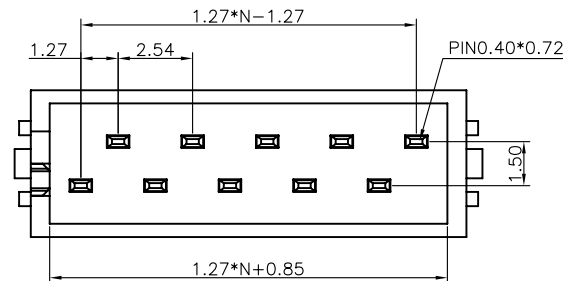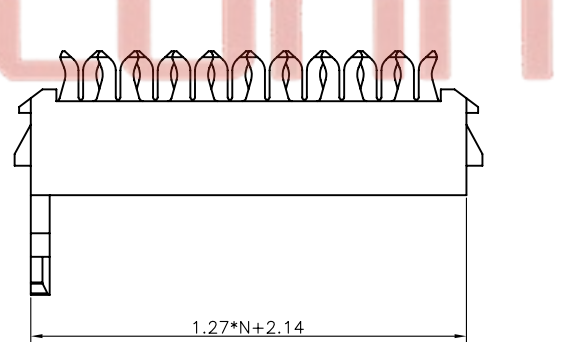

HOUSING

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MICRO MATCH
X.	±0.60	X.	±5°	UNITS	mm	MALE ON WIRE CONNECTOR	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1015-01 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1015-01-XXX						

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com