

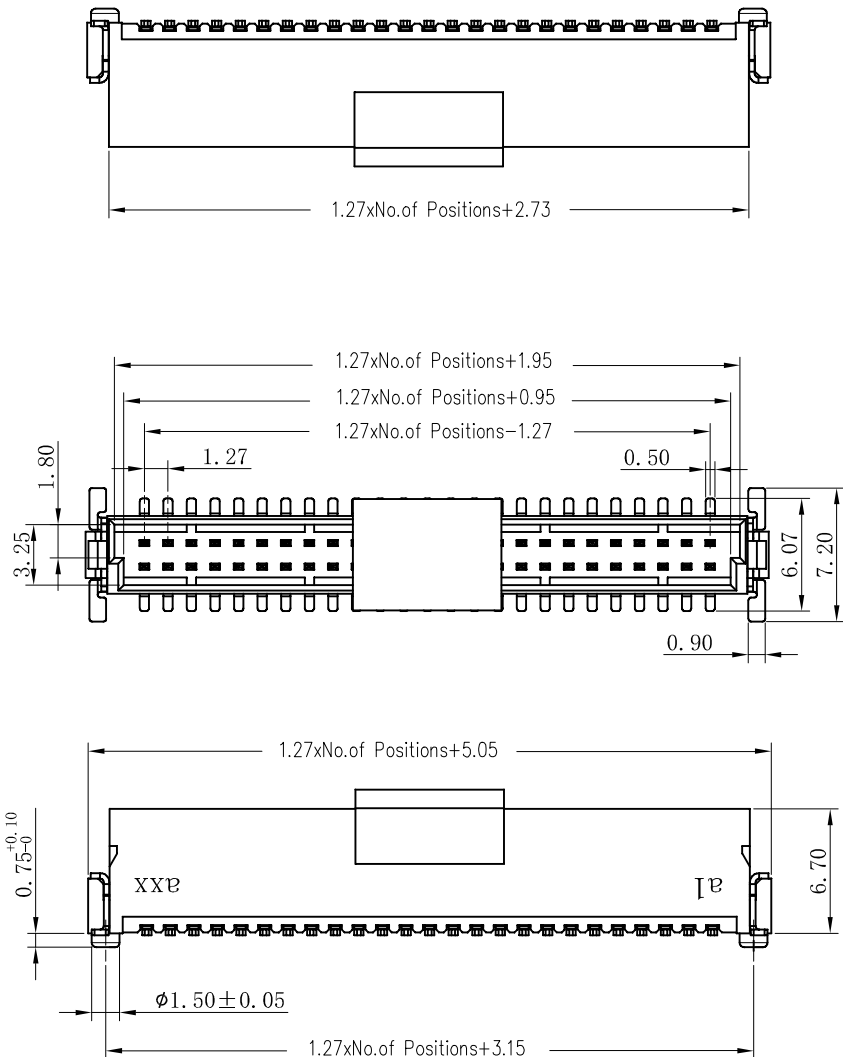


# LAT-CON 127, Male, Height 6.70mm, Pitch 1.27mm



Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE  $\pm 0.05$ )

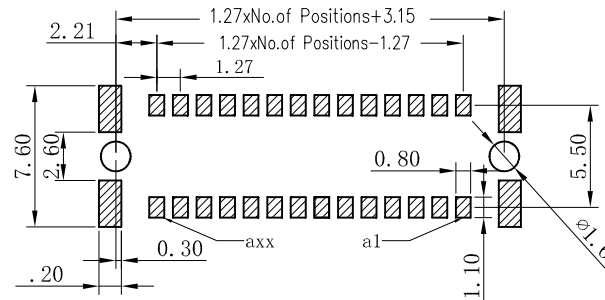

NOTES:  
 Rated Current: 0.5 AMP.  
 Contact Resistance: 25m $\Omega$  Max.  
 Withstand Voltage: 500V  
 Insulation Resistance: 10000M $\Omega$  Min.  
 Operation Temperature: -55 $^{\circ}$ C to +125 $^{\circ}$ C

Contact Material: Phosphor Bronze  
 Contact Plating: Sn and Au over Ni  
 Tail Material: Phosphor Bronze  
 Tail Plating: Sn over Ni  
 Main Body Material: LCP  
 Cover Material: LCP

Pancon P/N	Pin
033L012-167U	12
033L016-167U	16
033L020-167U	20
033L026-167U	26
033L032-167U	32
033L040-167U	40
033L050-167U	50
033L068-167U	68
033L080-167U	80

Nr.	DATE	NOTE	NAME
19.01.2018	issued	VAV	