

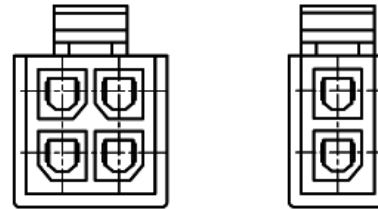
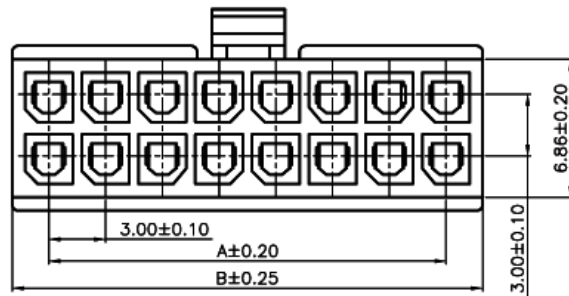


Specifications:  
 Current Rating:5.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:10m ohm. Max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding Voltage:1.500V AC/Minute  
 Operating Temperature Range:-25°C~+105°C  
 Material and Finish  
 Insulator:Nylon66 UL94V-0  
 Insulator Color: Black  
 Contact:Phosphor Bronze  
 Plating:Tin Plated




2,4Pin

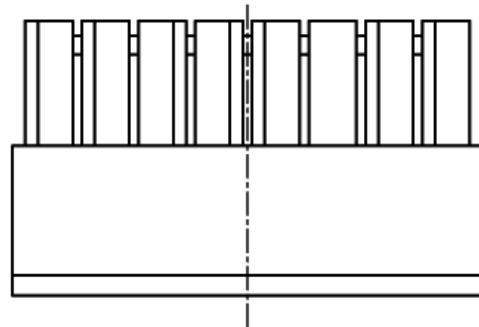


POS. NO.	Dimension	
	A	B
02	—	3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85




TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL
X. ±0.3	DRAWN Stephane	2009/DEC/18	3.0 Power Connector Receptacle Housing	Amphenol European Design Center
XX ±0.2	CHECKED Rob	2009/DEC/18		
X,XX ±0.15	APPROVED Rob	2009/DEC/18		
UNLESS OTHERWISE SPECIFIED	UNIT:	SIZE: <b>A4</b>	DRAWING N°	Scale N.A. Sheet 1 of 2
			MF30-HFD1-xx	REV. <b>A</b>

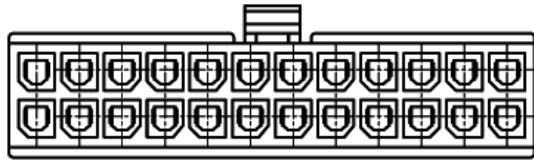


24




10




08

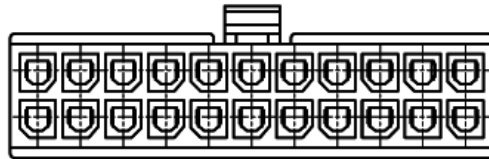


22




12




06

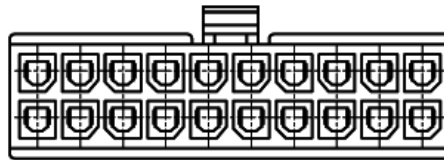


20



14

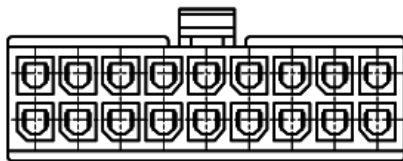

18

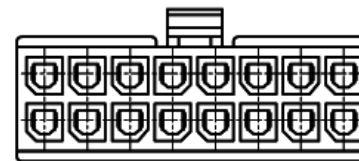

16



2~24P Protection Key Drawing(Ref.)

TOLERANCE (mm)		APPROVALS	DATE	TITLE 3.0 Power Connector Receptacle Housing	AMPHENOL Amphenol European Design Center	
X.	±0.3	DRAWN Stephane	2009/DEC/18		Scale N.A.	Sheet 2 of 2
XX	±0.2	CHECKED Rob	2009/DEC/18			
XXX	±0.15	APPROVED Rob	2009/DEC/18		REV. <b>A</b>	
UNLESS OTHERWISE SPECIFIED						UNIT: mm