
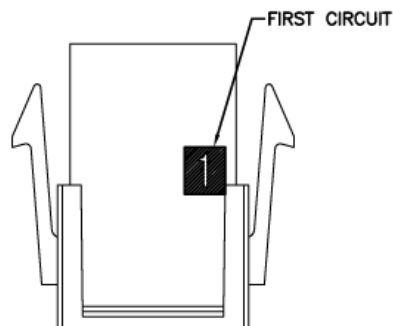

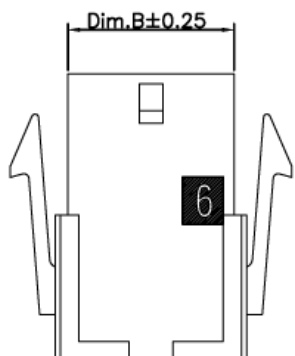


RECOMMENDED PANEL CUT-OUT

**Specifications:**

Current Rating:5.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:10m ohm. Max.  
 Insulation Resistance:1,000M ohm. Min.  
 Withstanding Voltage:1,500V AC For One Minute  
 Operating Temperature Range:-25°C To +105°C  
 Material:High Temp. Plastic(UL94V-0)  
 Contact:Phosphor Bronze  
 Plating:Tin Plated  
 Application Wire:Awg#24~#20

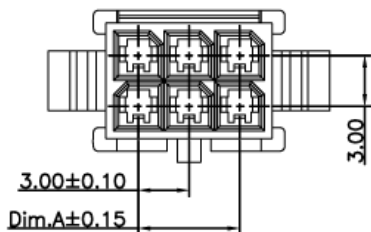

**Dimension Information:**

Circuits	Dim.A	Dim.B	Dim.C	Dim.D
2		3.85	4.21	7.90
4	3.00	6.85	7.21	10.90
6	6.00	9.85	10.21	13.89
8	9.00	12.85	13.21	16.89
10	12.00	15.85	16.21	19.89
12	15.00	18.85	19.21	22.89
14	18.00	21.82	22.21	25.88
16	21.00	24.85	25.21	28.88
18	24.00	27.85	28.21	31.88
20	27.00	30.85	31.21	34.87
22	30.00	33.85	34.21	37.87
24	33.00	36.85	37.21	40.87

TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
X. ±0.3	DRAWN Stephane	24/Feb/2009	3.0 Power Connector Housing for Male contact	Scale N.A.	Sheet 1 of 1
XX ±0.2	CHECKED Rob	24/Feb/2009		MF30-HMD1-XX	REV. A
X.XX ±0.15	APPROVED Rob	24/Feb/2009			
UNLESS OTHERWISE SPECIFIED	UNIT: mm	SIZE: A4	DRAWING N°		