
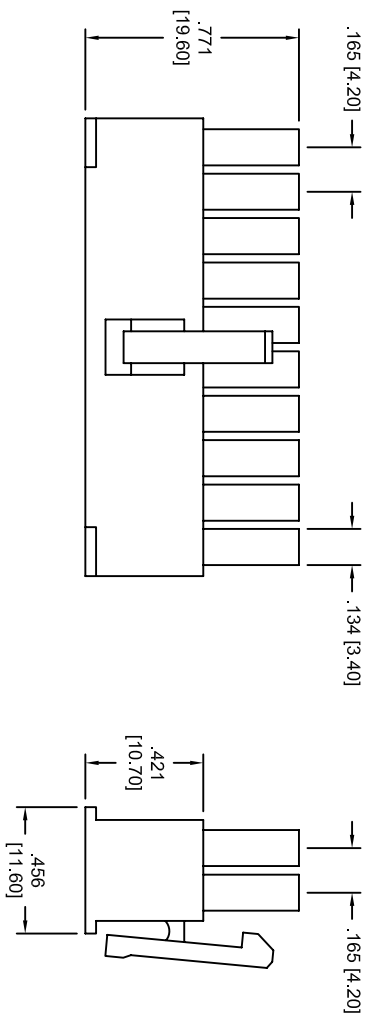


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/18/06	

APPROVED: _____
 DATE: _____ TITLE: _____

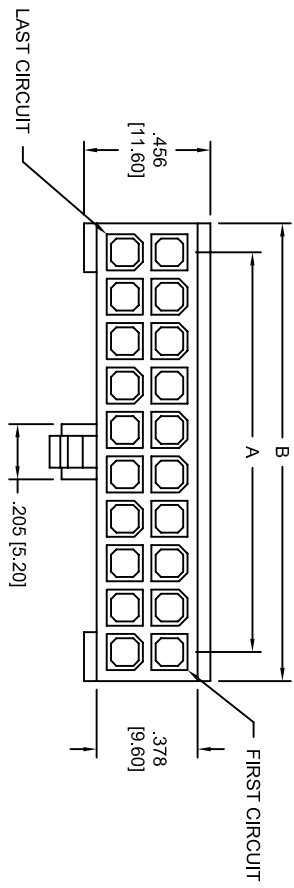

WIRE SIZE	CIRCUITS			
AWG	2	4-6	8-10	12-24
18	9 A	8 A	7 A	6 A
20	7 A	6 A	5 A	5 A
22	5 A	4 A	4 A	4 A
24	4 A	3 A	3 A	3 A

Positions: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24
 A = .165 [4.20] X No. of Spaces per row
 B = .165 [4.20] X No. of Positions per row + .055 [1.40]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO WIRE CONNECTOR HOUSING
 FEMALE, 4.2MM PITCH

SPECIFICATIONS:
 Material: Insulator: Nylon 66, rated UL 94V-2
 Insulator color: Natural
 Electrical: Operating voltage: 600 VAC RMS. max
 Current rating: / Circuit (See Chart)
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +120°C
 Environmental: Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DMH-XX	-
REF:	SCALE: NTS	SHEET 1 OF 1