

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/29/06'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.
- PRODUCT NUMBER CODE:


DS1004-02 - X X X

HOUSING COLOR  
B: Black

CONTACT PLATING  
1: Tin 150u"  
2: Tin 200u"  
3: G/F  
4: Gold 3u"  
5: Gold 10u"  
6: Gold 15u"

No.OF CONTACTS  
1\*1 - 1\*40  
2\*1 - 2\*40

SERIES No.  
DS1004-02

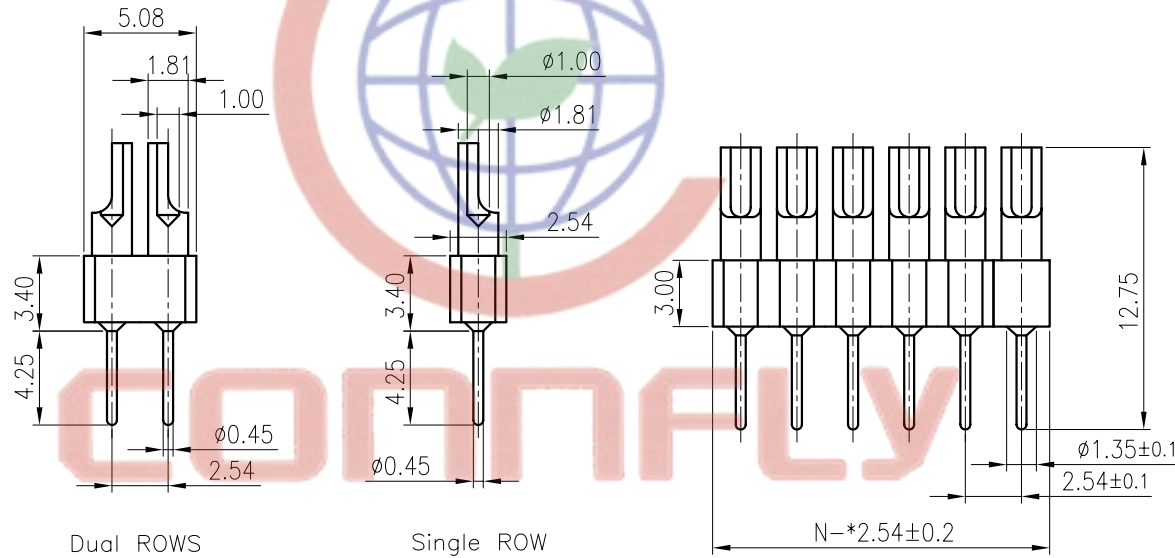

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB HEADER STRIPS PITCH 2.54mm
X.	±0.60	X.	±5°	UNITS	mm		SOLDER TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1004-02 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	10F1				
DRAWING NO.	C-DS1004-02-XXX						