
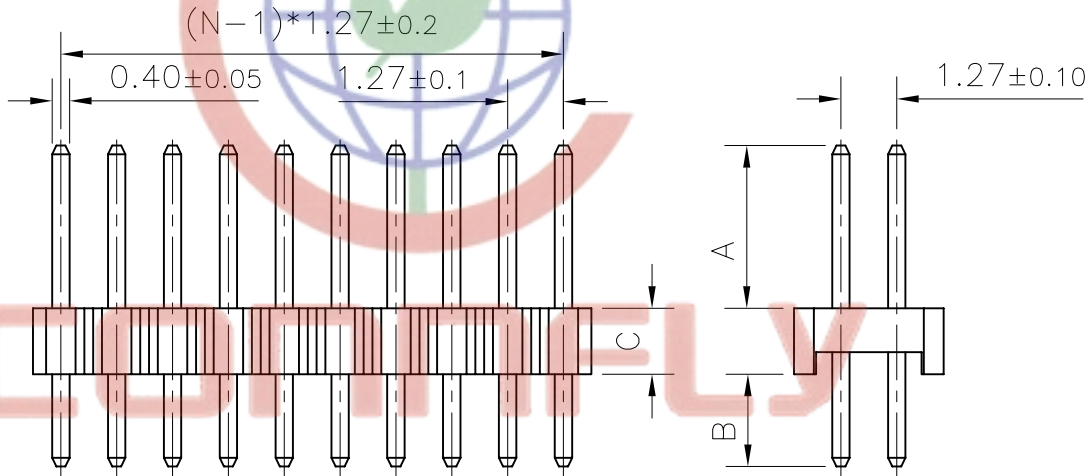


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/11/07'	~	

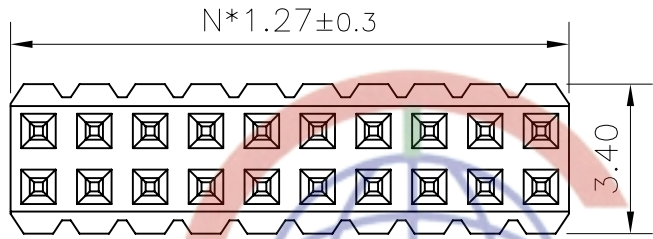

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.0 Amp.
  - INSULATION RESISTANCE:500MΩ Min.
  - DIELECTRIC WITHSTANDING:300VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PRODUCT NUMBER CODE:

DS1031-06 - X X X X X X


- DIM.A B TYPE
  - 1: TYPE 1
  - 2: TYPE 2
- HOUSING HEIGHT(DIM. C)
  - 1: 1.00mm
  - 2: 1.50mm
  - 3: 1.70mm
  - 4: 2.00mm
- MOUNTING TYPE
  - V: VERTICAL TYPE
- HOUSING COLOR
  - B:BLACK
- CONTACT PLATING
  - 8: FULL GOLD FLASH
- CONNECTOR TYPE
  - P:PLUG
- No.OF CONTACTS
  - 2\*1-2\*40

N:HALF OF CONTACTS

18		
19		
20		
21		
22		
23		
24		
25		

10		
11		
12		
13		
14		
15		
16		
17		

TYPE	DIM A	DIM B
1	3.70	2.10
2	3.50	3.50
3	4.00	2.50
4		
5		
6		
7		
8		
9		

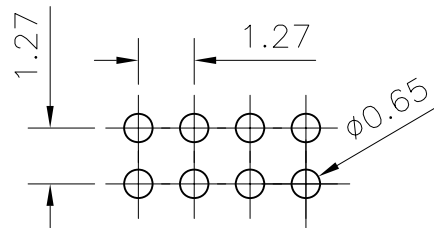

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS mm	1.27mm PITCH PIN HEADER DUAL ROW STRAIGHT
SHEET SIZE A4	SERIES DS1031-06 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1031-06-XXXXXXX		



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD