




Transformers intended for mounting in power supply circuitry of electronic devices with printed circuit boards. They feature a very small height and a compact build as well as having an increased mechanical durability and resilience to climate elements (cast resin). The transformers are made at IP00 protection grade, maximum ambient temperature 70°C, thermal class of insulation B (130°C). Manufactured in compliance with EN 61558-2-4 and EN 61558-2-6.



Rated power: 3 - 30 VA

Rated voltage PRI: 24 - 400 V 50/60 Hz

Rated voltage SEC: 4 - 400 V

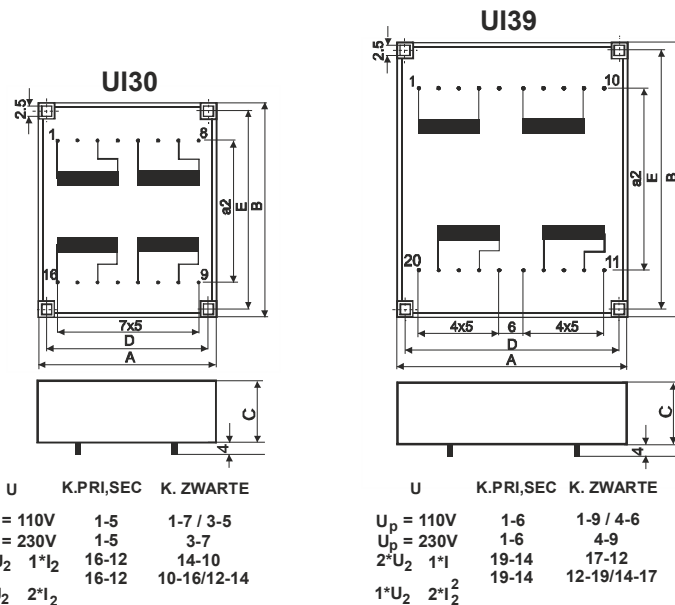

Type	Power (VA)	Dimensions (mm)					Weight (kg)	Typical leads	
		A	B	C	D	E		PRI	SEC
TPZ 3	3	44	53	17	37,5	47,5	35	0,12	1-3, 5-7 10-12, 14-16
TPZ 4	4	44	53	19	37,5	47,5	35	0,15	1-3, 5-7 10-12, 14-16
TPZ 6	6	44	53	22	37,5	47,5	35	0,18	1-3, 5-7 10-12, 14-16
TPZ 10	10	44	53	28	37,5	47,5	35	0,26	1-3, 5-7 10-12, 14-16
TPZ 11	10	57	68	22	50	62,5	45	0,28	1-4, 6-9 12-14, 17-19
TPZ 14	14	57	68	24	50	62,5	45	0,32	1-4, 6-9 12-14, 17-19
TPZ 18	18	57	68	27	50	62,5	45	0,38	1-4, 6-9 12-14, 17-19
TPZ 24	24	57	68	31	50	62,5	45	0,48	1-4, 6-9 12-14, 17-19
TPZ 30	30	57	68	35	50	62,5	45	0,54	1-4, 6-9 12-14, 17-19

As a result of constant development of product construction and changes concerning technical requirements, Breve Tufvassons reserves the right to change the parameters mentioned above.