

ÈÍ ÈÀÌ ÑÓÈÈÐÎ ÂÀÍ Í ÛÀ ØÈÍ Í ÛÀ ØÐÀÍ ÑÔÎ ÐÌ ÀÒÎ ÐÛ T-35



PSS



T-35,

II
 ta 40°C, B (130°C).
 : PN-EN 61558-2-4, PN-EN 61558-2-6.

: 10 — 100 VA
 PRI: 110 — 500 V 50/60 Hz
 SEC: 6 — 250 V

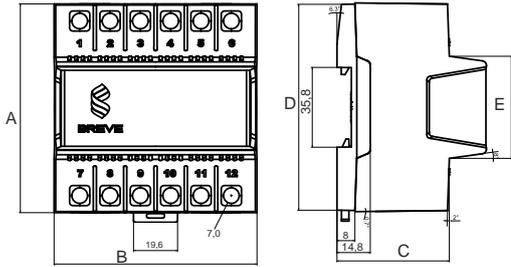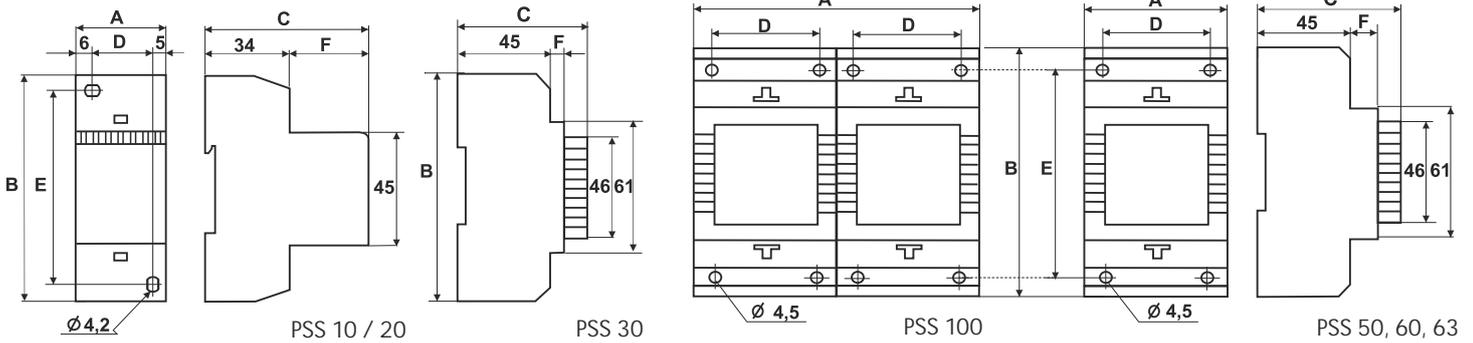

PSS 50N, PSS 63N, PSS 80N



PSS



PSS N

		[VA]	(MM)					[kg]	
			A	B	C	D	E		
PSS 10	230/ 24V	16024-0150	10	35	92	66	24	79	0,32
PSS 20	230/ 24V	16024-0178	20	53	110	66	40	88	0,56
PSS 30	230/ 12V	16012-9983	30	72	110	63	52	98	0,9
PSS 30	230/ 24V	16024-9997	30	72	110	63	52	98	0,9
PSS 50	230/ 12V	16012-9981	50	72	110	72	52	98	1,1
PSS 50	230/ 24V	16024-9994	50	72	110	72	52	98	1,1
PSS 50N	230/ 12V	16012-9905	50	94	90	50	92	46	1,1
PSS 50N	230/ 24V	16024-9888	50	94	90	50	92	46	1,1
PSS 60	230/ 24V	16024-9938	60	72	110	72	52	98	1,2
PSS 63	230/ 12V	16012-9976	63	72	110	72	52	98	1,2
PSS 63	230/ 24V	16024-9979	63	72	110	72	52	98	1,2
PSS 63N	230/ 12V	16012-9907	63	94	90	50	92	46	1,1
PSS 63N	230/ 24V	16024-9890	63	94	90	50	92	46	1,1
PSS 80N	230/ 12V	16012-9906	80	94	90	50	92	46	1,3
PSS 80N	230/ 24V	16024-9889	80	94	90	50	92	46	1,3
PSS 100	230/ 12V	16012-9975	100	144	110	72	52	98	2,2
PSS 100	230/ 24V	16024-9973	100	144	110	72	52	98	2,2

«Breve-Tufvassons»

