

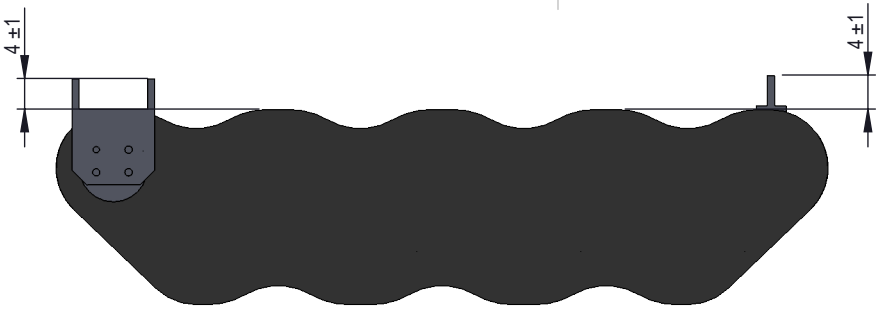

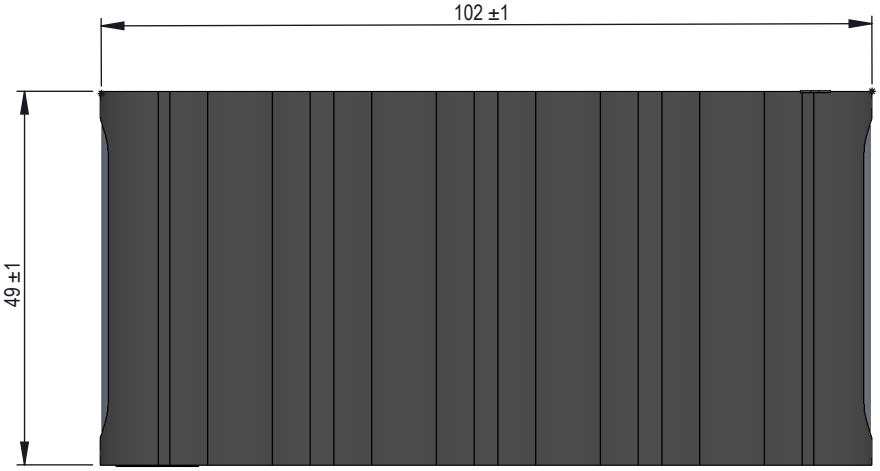

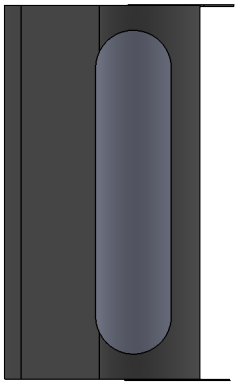

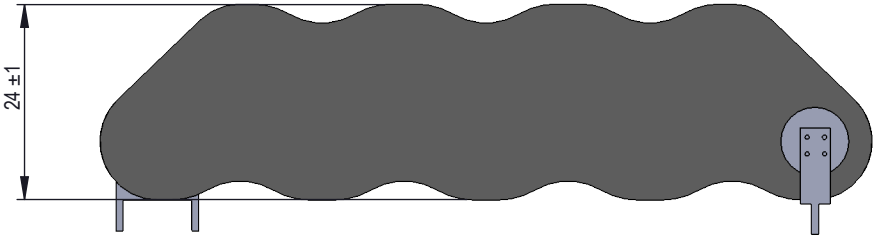

Specifications		
Nominal Voltage [V]		21.6
Typical capacity [mAh]		300
Size [mm]		According to the drawing
Typical charge [mA]		30 (16 hrs)
Rapid charge [mA]		300 (temp.20°C)
Standard continuous discharge current [mA]		300 (temp. 20°C)
Charge temperature	Typical	0°C do 60°C
Discharge temperature	Continous	-20°C do 70°C
Storage temperature	Recommended	-20°C do 45°C

Label 50x30mm

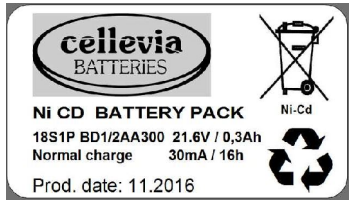

Material/ Materiał:		Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończnie : _		Date/ Data:	cellevia BATTERIES			Revision/ Rewizja:_
Designed by/ Konstruował:						ERP system number: 63353
Checked by/ Sprawdził:						
Approved by/ Zatwierdził:						
Update/ Aktualizował: J.Dadacz	Update/ Data aktualizacji:	Date of implementation/ Data wykonania: 2016-11-07	Product reference/ Nazwa: BD-1/2AA300 21,6V 0,30Ah cyli			Docum. number/ Nr rysunku:

S:\DZIAŁ_BADAŃ_I_ROZWOJU\PUBLIC\2NY\PROJEKTY NIEMADZOROWANE PRZEZ DTI\ME (63353)\ WAM BD-1_2AA300 21,6V 0,30Ah cyli\