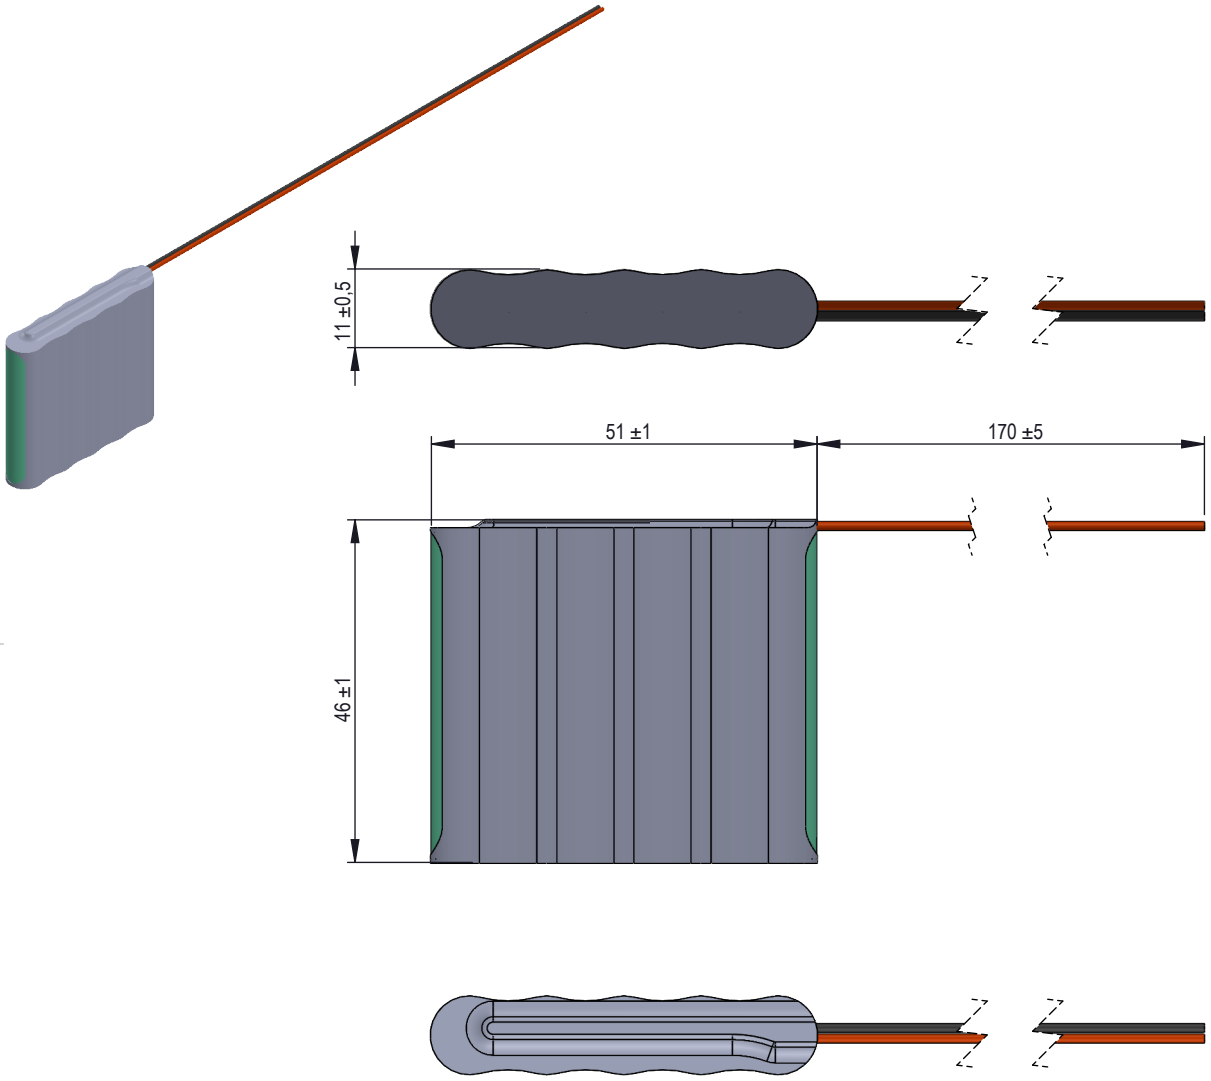

Specifications

Nominal Voltage [V]		6
Typical capacity [mAh]		650
Size [mm]		According to the drawing
Typical charge [mA]		70 (16 hrs)
Rapid charge [mA]		700 (temp.20°C)
Maksimum continuous discharge current [mA]		340 (temp. 20°C)
Charge temperature	Typical	0°C do 45°C
Discharge temperature	Continous	-20°C do 60°C
Storage temperature	Recommended	-20°C do 25°C

Label 50x20mm



Material/ Materiał:	Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończnie : _	Date/ Data:	cellevia BATTERIES			Revision/ Rewizja:_
Designed by/ Konstruował:					
Checked by/ Sprawdził:					ERP system number:
Approved by/ Zatwierdził:					24427
Update/ Aktualizował: J. Dadacz	Update/ Data aktualizacji:	Date of implementation/ Data wykonania: 2016-11-08	Product reference/ Nazwa: ACCU-PAK5AAA/V WAM VH700AAA 6,00V 0,70Ah cyli		Docum. number/ Nr rysunku:

S:\DZIAŁ_BADAN_I_ROZWOJU\PUBLICZNY\PROJEKTY NIENADZOROWANE PRZEZ DTI\TME (24427) VH700AAA 6,00V 0,70Ah cyli\