


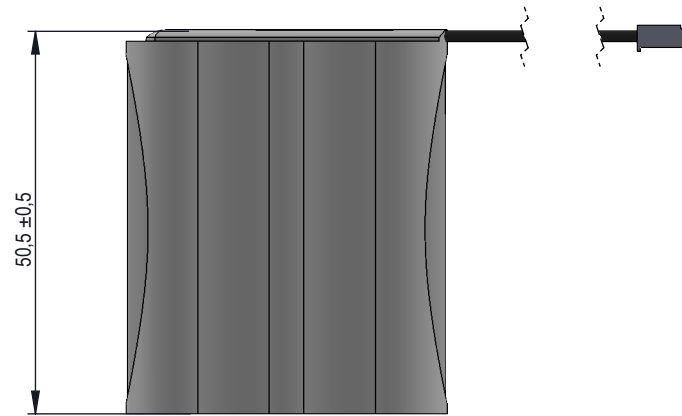
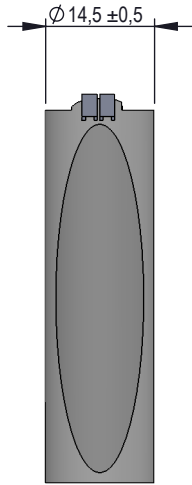
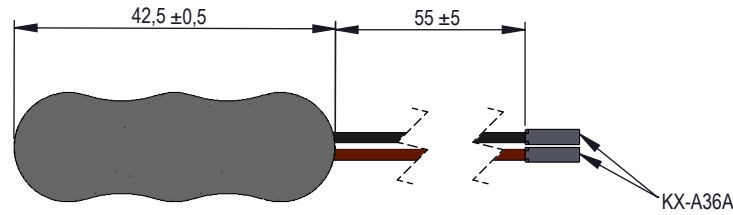



### Specifications

Nominal Voltage [V]	3.6	
Typical capacity [mAh]	1000	
Size [mm]	According to the drawing	
Typical charge [mA]	100 (16 hrs)	
Rapid charge [mA]	500 (temp. 20°C)	
Maximum discharge current [mA]	3000 (temp. 20°C)	
Charge temperature	Typical	0°C do 45°C
Discharge temperature	Continous	-20°C do 60°C
Storage temperature	Recommended	-20°C do 30°C



Label 45x25mm

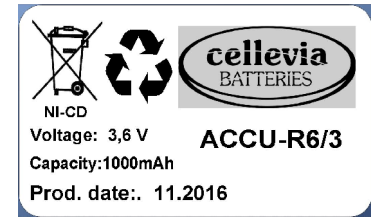

Material/ Materiał:	Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończenie: _	Date/ Data:				Revision/ Rewizja: _
Designed by/ Konstruował:					ERP system number: 2245
Checked by/ Sprawdził:					
Approved by/ Zatwierdził:					
Update/ Aktualizował:	Update/ Data aktualizacji:	Date of implementation/ Data wykonania:	Product reference/ Nazwa:	Docum. number/ Nr rysunku:	
J. Dadacz		2016-11-10	ACCU-R6/3 BD-AA1000 3,60V 1,00Ah cylind		

S/DZIAŁ\_BADAN\_I\_ROZWOJU/PUBLIKNYPROJEKTY\_NIEMODZKROKOWANE\_PREZDZITTIME\_C2A51BDAA1000\_3,60V\_1,00Ah\_cylind