

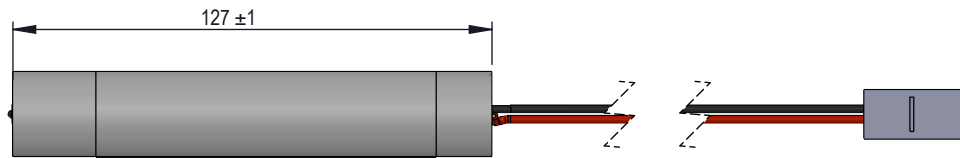
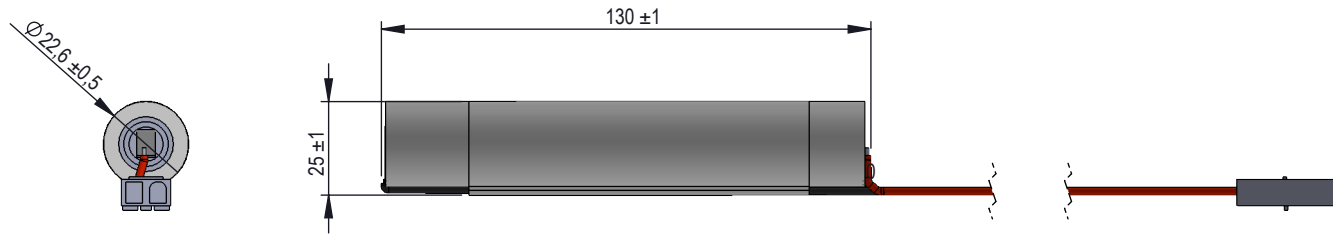



### Specifications

Nominal Voltage [V]		3.6
Typical capacity [mAh]		1500
Size [mm]		According to the drawing
Typical charge [mA]		150 (15 hrs)
Standard continuous discharge current [mA]		750 (temp. 20°C)
Charge temperature	Typical	0°C do 60°C
Discharge temperature	Continous	-20°C do 70°C
Storage temperature	Recommended	-20°C do 45°C

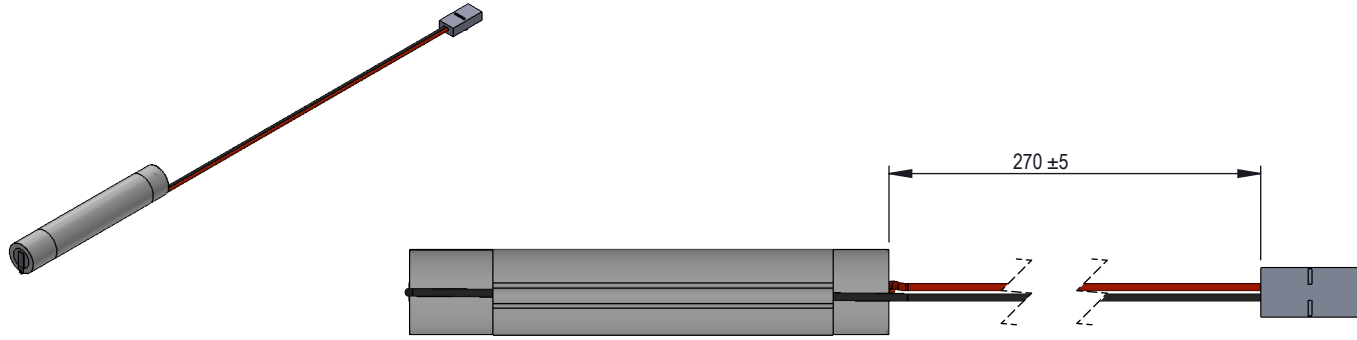

Label: 50x30mm

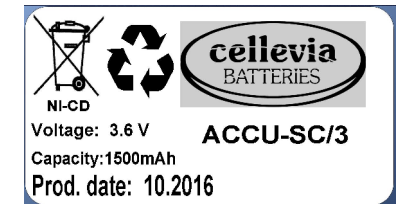

Material/ Materiał:	Scale/ Skala: 1:2	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończenie: _	Date/ Data:				Revision/ Rewizja: _
Designed by/ Konstruował:					ERP system number:
Checked by/ Sprawdził:					277481
Approved by/ Zatwierdził:					
Update/ Aktualizował:	Update/ Data aktualizacji:				Date of implementation/ Data wykonania:
J. Dadacz		2016-10-10	3S1P BD-SC1500H 3.60V 1,50Ah ACCU-SC/3		

SDZIAL\_BADAN\_LI\_ROZWOJU/PLI/IZNY/PROJEKTY/NIEMODZKROWANE/PRZEZDTITIME (277481) (SIP\_BD-SC1500H3.60V\_1.50Ah.qst)