



52 ± 1

15 ± 1

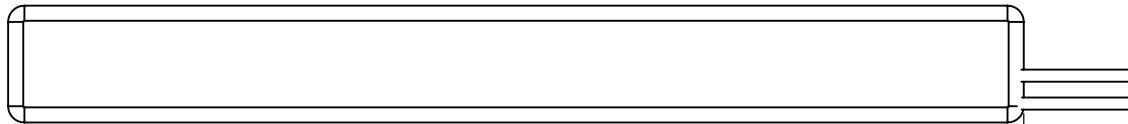


134 ± 1

100 ± 5

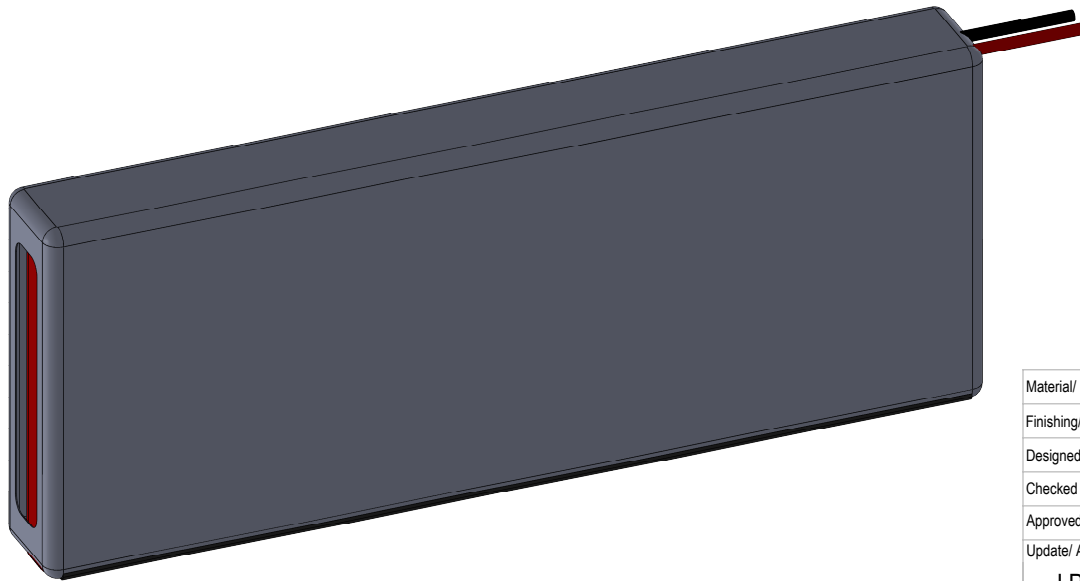

Specifications		
Nominal Voltage [V]		14.8
Minimum capacity [mAh]		1850
Typical capacity [mAh]		1950
Charging method		CC\CV
Charging voltage [V]		16.8
Size [mm]		According to the drawing
Weight [g]		200 ± 25
Typical charge [mA]		370
Rapid charge [mA]		1295
Standard continuous discharge current [mA]		3500 ( 25°C)
Discharge cut-off voltage [V]		12.0
Peak discharge current [mA]		3800
Charge temperature	Typical	0°C do 45°C
Charge temperature	Rapid	10°C do 45°C
Discharge temperature	Continous	-20°C do 60°C
Storage temperature	Recommended	-20°C do 35°C

Label:

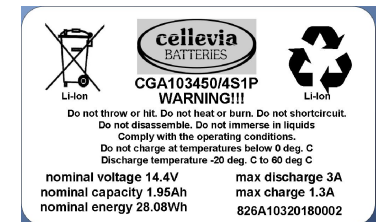

Material/ Materiał:	Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa: -	Sheet/ Arkusz: /	Version/ Wersja: 1
Finishing/ Wykończenie :	Date/ Data:				Revision/ Rewizja: A
Designed by/ Konstruował:	dd.mm.yyyy				
Checked by/ Sprawdził:	dd.mm.yyyy				
Approved by/ Zatwierdził:	dd.mm.yyyy				
Update/ Aktualizował:	Update/ Data aktualizacji:	Date of implementation/ Data wykonania:	Product reference/ Nazwa:	Docum. number/ Nr rysunku:	
J.Paliwoda	2018-01-29	2012-10-22	CGA103450/4S1P 4S1P CGA103450A	P826.01.001.1A	