

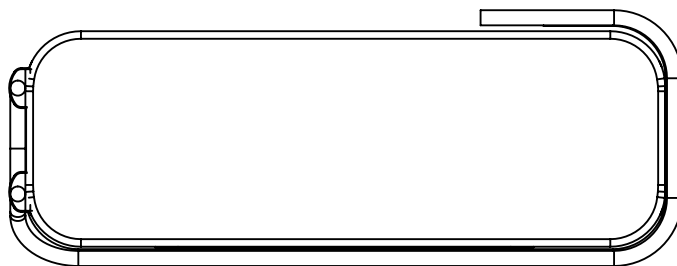
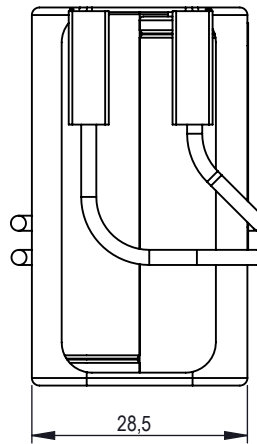



Cable length= 150mm

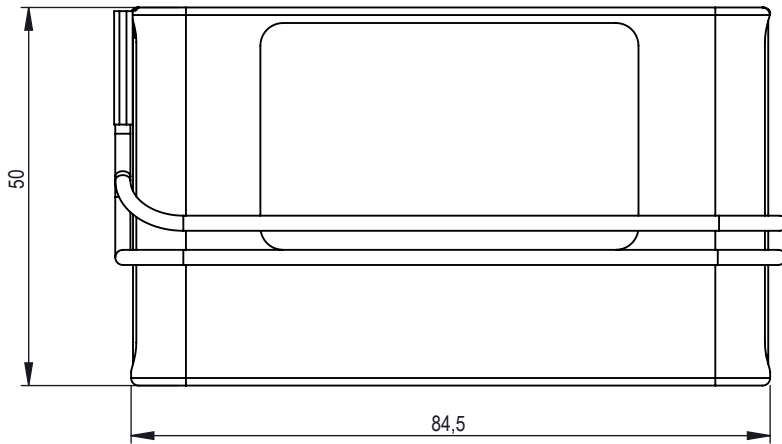

Specifications		
Nominal Voltage [V]	14.4	
Rated capacity [mAh]	700	
Size [mm]	According to the drawing	
Weight [g]	280 ± 25	
Typical charge [mA]	70	
Standard continuous discharge current [mA]	2100 (25 °C)	
Charge temperature	Typical	0 °C do 45 °C
Discharge temperature	Continuous	-20 °C do 60 °C
Storage temperature	Recommended	5 °C do 25 °C

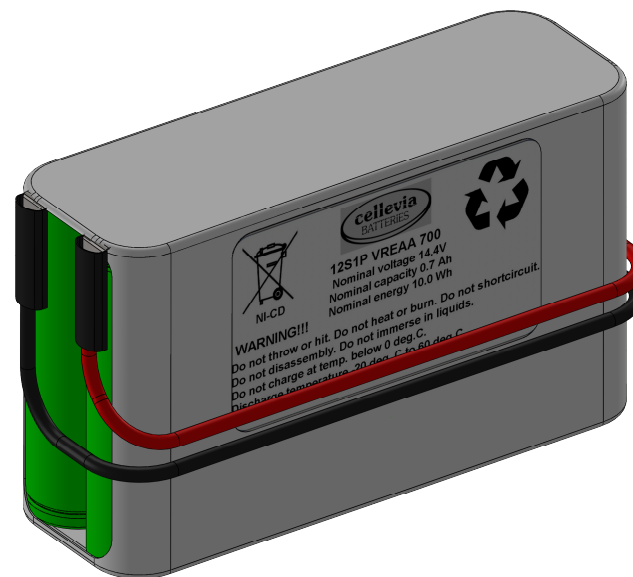

Label:

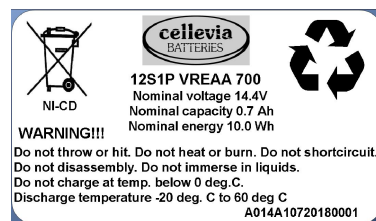

Material/ Materiał:	Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa: -	Sheet/ Arkusz: /	Version/ Wersja: 1
Finishing/ Wykończenie:	Date/ Data:				Revision/ Rewizja: A
Designed by/ Konstruował:	dd.mm.yyyy				
Checked by/ Sprawdził:	dd.mm.yyyy				
Approved by/ Zatwierdził:	dd.mm.yyyy				
Update/ Aktualizował:	Update/ Data aktualizacji:	Date of implementation/ Data wykonania:	Product reference/ Nazwa:	Docum. number/ Nr rysunku:	
	2018-02-16	2018-02-16	12S1P VREAA 700	A014.00.00.1A	