


Specifications		
Nominal Voltage [V]	4.8	
Minimum capacity [mAh]	4500	
Typical capacity [mAh]	4750	
Size [mm]	According to the drawing	
Weight [g]	480 ±25	
Typical charge [mA]	450mA for 15 hrs at 20°C	
Standard continuous discharge current [mA]	900 (temp. 20°C)	
Discharge cut-off voltage [V]	4	
Charge temperature	Typical	0°C do 45°C
Discharge temperature	Continous	-20°C do 60°C
Storage temperature	Recommended	-20°C do 30°C

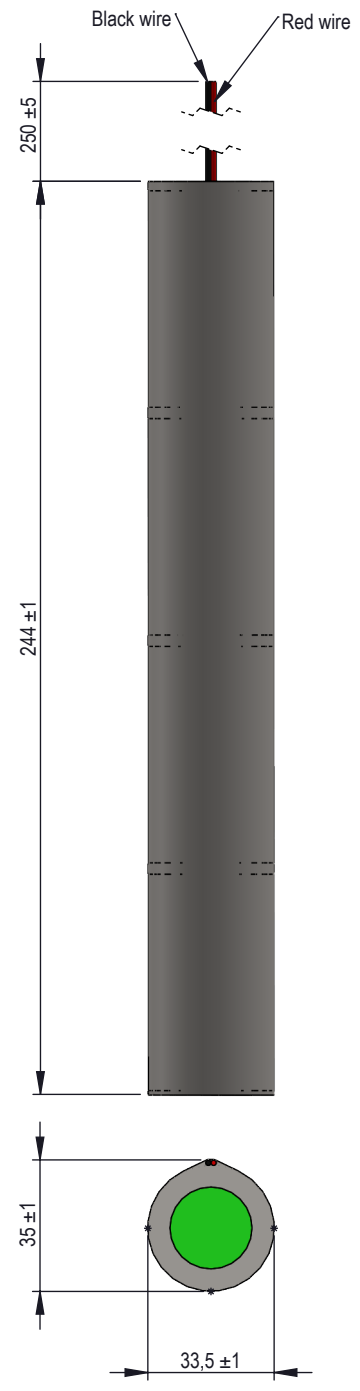

Uwaga:  
 Gabaryty pakietu zostały określone na podstawie górnych wymiarów ogniwa z karty katalogowej dostarczonej przez producenta.  
 Note:  
 Size of package are based on the upper dimensions of the cell taken from data sheet supplied by the manufacturer.

Material/ Materiał:	Scale/ Skala: 1:2	Format/ Format arkusza: A4	Weight/ Masa: _	Sheet/ Arkusz: /	Version/ Wersja: 1
Finishing/ Wykończenie:	Date/ Data:				Revision/ Rewizja: A
Designed by/ Konstruował:	dd.mm.yyyy				
Checked by/ Sprawdził:	dd.mm.yyyy				
Approved by/ Zatwierdził:	dd.mm.yyyy				
Update/ Aktualizował:	Update/ Data aktualizacji:				
J. Wierzba	2016-09-19	2016-08-30	CL-D_HT4.8V_L 4S1P D4500	1484.00.00.1A	