

GP Batteries

Data Sheet

Model No.: GP1604AUP

MERCURY FREE

Description : Alkaline Manganese 9V Battery
Chemical System : Alkaline Manganese Dioxide
Nominal Voltage : 9.0 Volts
Operating Temp. : -20 - 60 °C , 65 % RH Max.
Storage Temp. : 15 - 25 °C , 45 - 75 % RH
Nominal Dimensions : 25.5 (L) x 16.5 (W) x 47.5 (W) mm
Terminal : Nickel plated miniature snap fasteners
Jacket : Printed metal jacket
Internal Connection : Welding
Application : All electronics devices
Nominal Weight : 48g
Date Code : Unless otherwise specified, every battery will carry a 6-digits month-year (MM-YYYY) expiry code.

Special Feature : **World class explosion proof**

Shelf Life : 5 Years as below conditions,

Electrical Characteristics

Test Items	Test Conditions 25±2°C 60±15% RH	Specification (Volt), min			
		3 Months	1 year	3 years*	5 years*
OCV		9.55 V	9.30 V	9.10 V	8.90 V
CCV	47 Ω, 0.3 sec	8.65 V	8.00 V	7.70 V	7.30 V


Discharge Capacity

Test Items	Test Conditions 25 ± 2°C 60±15% RH (EV = End Voltage)	Specification (Hours), mean			
		3 Months	1 year	3 years*	5 years*
Duration	270 Ω Intermittent 1hr/day EV = 5.40V	20.5	20.2	18.7	16.7
	620 Ω Intermittent 2hr/day EV = 5.40V	49.0	47.5	45.0	44.0
	10 k Ω background 24 h/d, 620 Ω 1 s/h pulse EV = 7.50V	Specification (Days), mean			
		20.0	19.5	18.5	17.5

* Storage performance are estimated.

Cross References :

GP	JIS	IEC	EVEREADY	DURACELL
1604A	6LF22	6LF22	522	MN1604

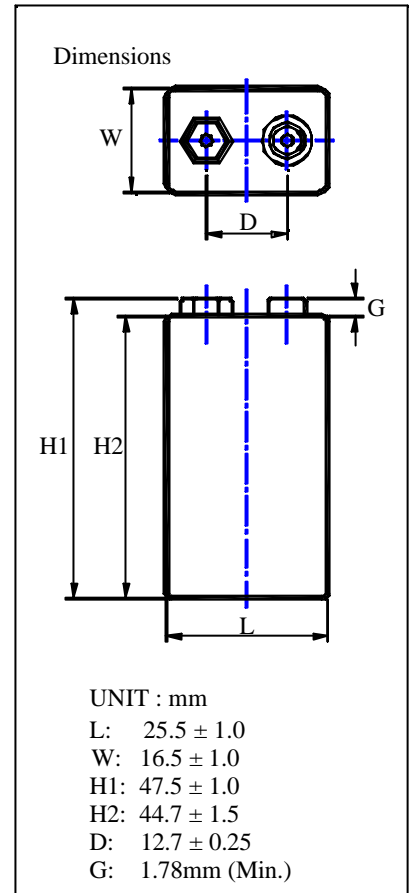

Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

Data Sheet: RPKS 9031 REV 4

06/2009