


S/DZIAŁ\_BADAN\_I\_ROZWOJU/PUBLI\_KAZN/PROJEKTY\_NIEMODL\_OROWANE\_PREZ\_DTTIME\_98625\_WAM\_BD-2/3A600\_7,2V\_0,60Ah.cyli

### Specifications

Nominal Voltage [V]	7.2
Typical capacity [mAh]	600
Size [mm]	According to the drawing
Typical charge [mA]	60(15 hrs)
Standard continuous discharge current [mA]	600 (temp. 20°C)
Charge temperature	Typical 0°C do 60°C
Discharge temperature	Continous -20°C do 70°C
Storage temperature	Recommended -20°C do 45°C

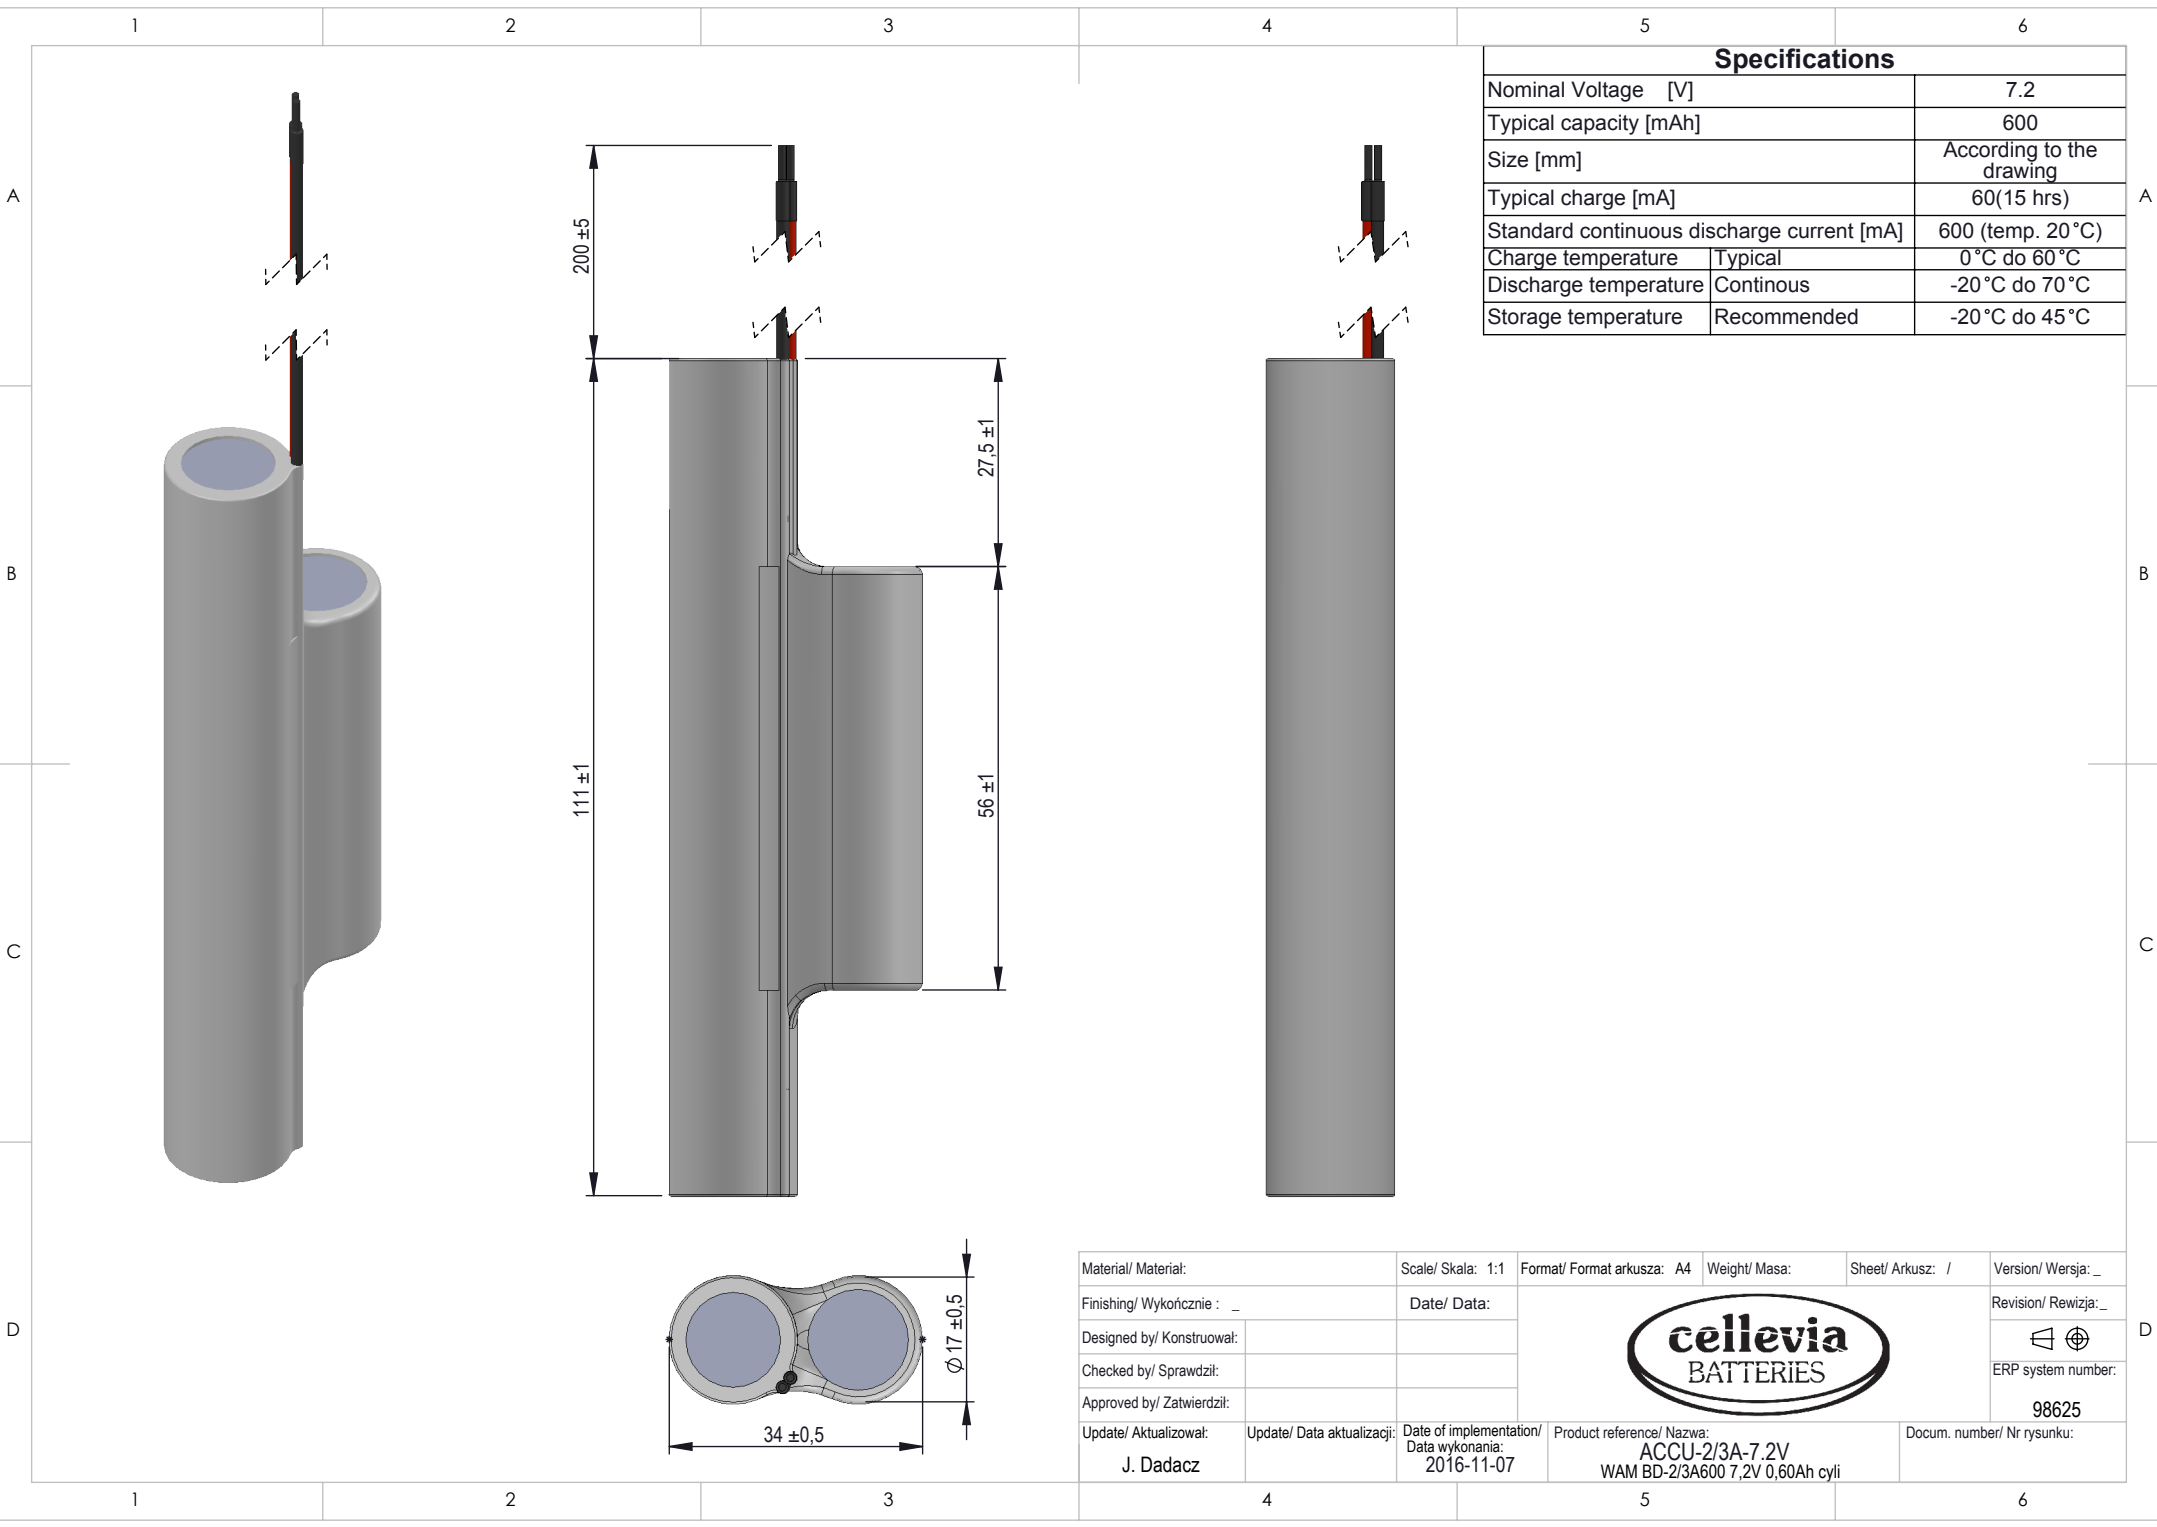

Material/ Materiał:	Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończenie : _	Date/ Data:				Revision/ Rewizja: _
Designed by/ Konstruował:					ERP system number:
Checked by/ Sprawdził:					98625
Approved by/ Zatwierdził:					
Update/ Aktualizował:	Update/ Data aktualizacji:	Date of implementation/ Data wykonania:	Product reference/ Nazwa:	Docum. number/ Nr rysunku:	
J. Dadacz		2016-11-07	ACCU-2/3A-7.2V WAM BD-2/3A600 7,2V 0,60Ah cyli		