


# CL-SM30M

## High Efficiency, High Quality PV Module

| Electrical Characteristics                          |   | CL-SM30M                        |
|---|---|---------------------------------|
| Maximum power (Pmax)                                |   | 30W                             |
| Voltage at Pmax (Vmp)                               |   | 18.6V                           |
| Current at Pmax (Imp)                               |   | 1.62A                           |
| Open-circuit voltage (Voc)                          |   | 22.9V                           |
| Short-circuit current (Isc)                         |   | 1.77A                           |
| Temperature coefficient of Voc                      |   | $-(0.40 \pm 0.05)\% / ^\circ C$ |
| Temperature coefficient of Isc                      |   | $(0.065 \pm 0.01)\% / ^\circ C$ |
| Temperature coefficient of power                    |   | $-(0.5 \pm 0.05)\% / ^\circ C$  |
| NOCT (Air 20°C; Sun 0.8kW/m <sup>2</sup> wind 1m/s) |   | 47±2°C                          |
| Operating temperature                               |   | -40°C to 85°C                   |
| Maximum system voltage                              |   | 600V DC                         |
| Power tolerance                                     |   | + 3%                            |
| Cells   | monocrystalline silicon solar cell            |                                 |
| No. of cells and connections                        |   | 36(2*18)                        |
| Module Dimension                                    | 650mm[25.59in.]x350mm[13.78in.]x25mm[0.98in.] |                                 |
| Weight  | 3.1kg[6.82lbs]                                |                                 |

\* STC:Irradiance 1000W/m<sup>2</sup>, AM1.5 spectrum, module temperature 25°C


\* Specifications are subject to change without notice at any time.

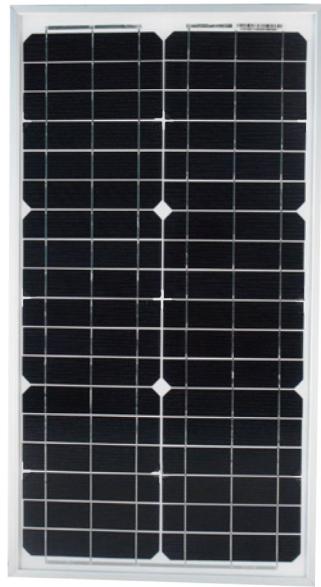


### Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module,passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacture is certified for ISO 9001:2000


### Module Diagram

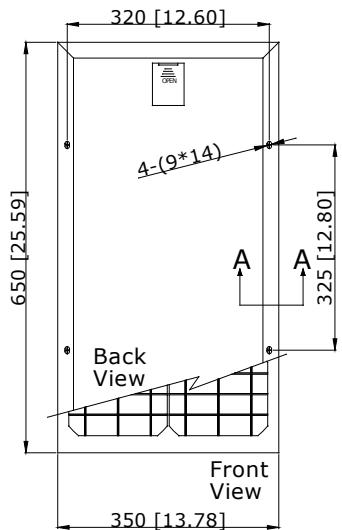

Dimensions in brackets are in inches.  
Un-bracketed dimensions are in millimeters.  
Unit:mm[in.]



Junction Box  
Top View (Lid open)



Section A-A

### Product's Guarantee

- 15 years module power output no less 90%
- 20 years module power output no less 80%

### Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications



CELLEVIA POWER

### I-V Curves

