

(A Universal Charger)

**It is compatible with most
your batteries.**

1. Li-ion/IMR/INR/ICR:

10440 14500 14650 16340 17335

17500 17670 18350 18490 18500

18650 18700 22650 25500 26650

32650 3.6V/3.7V

2. Ni-MH/Ni-CD:

AAAA AAA AA A SC C D






[Save Your Precious Time]

The Fastest and the Most Efficient Charger.

Fully charge 2 pcs 2500mAh 18650 just takes about 1.5hrs.



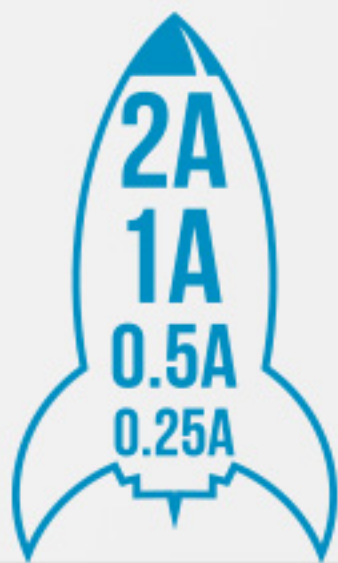

[The Quickest Current and the Smallest Current]

Four optional charging currents (0.25A/0.5A/1.0A/2.0A).

High current can charge with high speed while low current can maximize the battery life.



(Innovative LCD Screen)

LCD screen displays battery power, charging status and charging current.

+ LCD back light will dim after no operation and it can be switched off.

[Automatic Charger]

Charge Li-ion batteries and Ni-MH battery at the same time.

Battery life optimization charging
(TC/CC/CV for Li-ion, pulse charging for Ni-MH)





[Elaborate Heat Dissipation Design]

Keep the temperature impressively low during fast charging with 2A.



[0V Activation Function]

Revive “damaged” (low voltage) batteries.

Bring your over discharged batteries back to life.



[The Safest Charger with Longest Warranty]

Safe, Durable and Peace of Mind.



Certified by CE, ROHS, FCC.

2 years warranty.

The voltage go through the charger is safety voltage which is lower than 36V.

Temperature monitoring.

Flame retardant material.

Reverse polarity and short circuit protection.

[SV2 ROCKET Specification]

Input Power	12V DC/2.0A
0.25A Constant Current	250mA
0.5A Constant Current	500mA
1A Constant Current	1000mA
2A Constant Current	2000mA
Cut-Off Voltage	Li-ion : 4.2 V Ni-MH/Ni-CD: 1.45V
Operation Temperature	0-40 °c

Net weight: 115g / Size: L117.5*W74*H38mm



[Package Contents]

SV2 Charger, Wall Adapter (optional standards), Car Adapter, User Manual, Warranty Card.

*Optional wall adapter standards: US, EU, UK, AU, JP.



US/JP



EU



UK



AU