


Magnetic Transducer

SMT24 series



DIMENSIONS

Date : 29 Aug., 2005

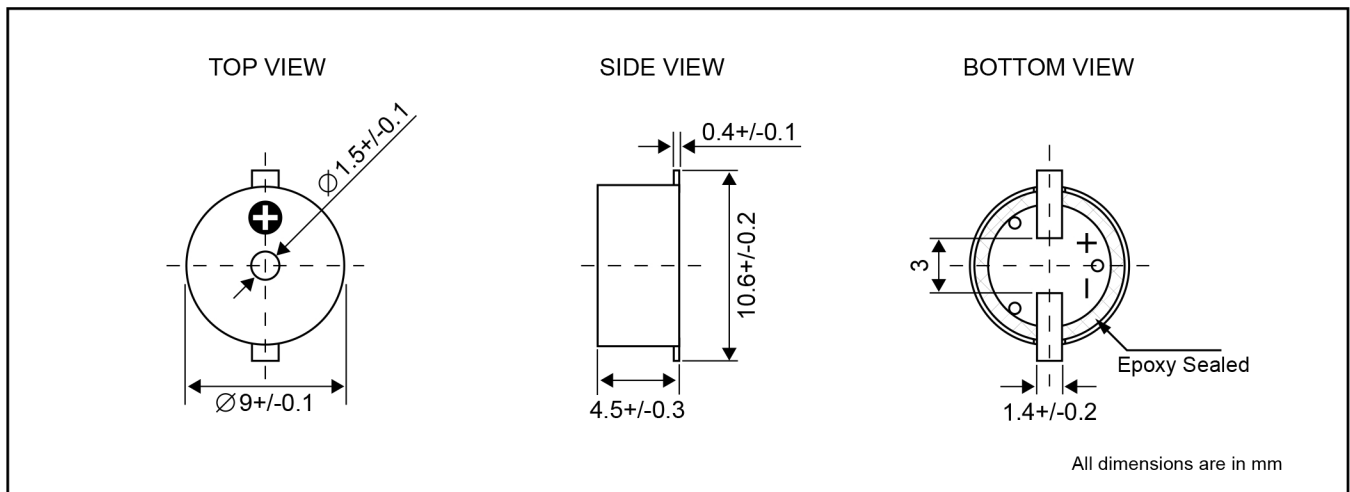

Remark : RoHS

ELECTRICAL SPECIFICATIONS

Model No.	LD-BZEL-T24-0904
Operating Voltage <input type="checkbox"/> [V]	1.5 ~ 4
Rated Voltage <input type="checkbox"/> [V]	3
* Max. Rated Current <input type="checkbox"/> [mA]	80
Coil Resistance <input type="checkbox"/> [ohm]	16 +/- 3
* Min. Sound Output <input type="checkbox"/> [dBA /10cm]	85
Resonant Frequency <input type="checkbox"/> [Hz]	2731
Operating Temperature <input type="checkbox"/> [°C]	-30 ~ +70
Terminal	SMD
Housing Material	LCP
Colour	Black
Weight <input type="checkbox"/> [gm]	0.6

* Value applying rated voltage [resonant frequency, 1/2 duty, square wave] and recommended circuit [HFE >200, min.2.5mA]