FIBOX
Enclosing innovations

# MNX ABS 175/125 HG

Sample photo

| | | | |
|---|---|---|---|
| **Order symbol**: | ABS 175/125 HG | **EAN**: | 6418074052339 |
| **Product nbr**: | 6081322 | **El. number**: | |
| **Description**: | Enclosure, ABS | Finland: | 3435224 |
| **Remarks**: | Grey cover | Electric No. Denmark: | 8212023725 |
| | | Electric No. Sweden: | 6081322 |

Including: Base with TPE gasket, screws for mounting plate/DIN-rail and cover with polyamide cover screws.

| **Dimensions**: | **Length** | **Width** | **Height** |
|---|---|---|---|
| **mm**: | 180 | 180 | 125 |
| **inch**: | 7.1 | 7.1 | 4.9 |

**Materials**:

| | |
|---|---|
| **Material**: | ABS |
| **Base colour**: | RAL 7035 -light grey |
| **Cover screws material**: | Polyamide |
| **Cover colour**: | RAL 7035 -light grey |
| **Cover screws colour**: | Grey |
| **Gasket material**: | TPE |

**Temperatures**:

| | |
|---|---|
| **Temperature °C (short term)**: | -40 … 80 °C |
| **Temperature °C (continuous)**: | -40 … 60 °C |
| **Temperature °F (short term)**: | -40 … 175 °F |
| **Temperature °F (continuous)**: | -40 … 140 °F |

**Accessories**:

| | |
|---|---|
| MIV 175 | Mounting plate (Galvanized steel) |

**Accessories**:

| | |
|---|---|
| MIN 15 | DIN-15 Mounting rail |
| MIV 15 | DIN-35 Mounting rail |
| FP A 175/180 | Front plate (Aluminium) |
| HFP 180 | Front plate hinge series |
| FP 22046 | Wall fastening lug (4 pcs) |

**Rating**:

Ingress Protection (EN 60529): IP66/IP67
Impact Resistance (EN 62262): IK07
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
Flammability Rating: UL 94 HB
Glow Wire Test (IEC 695-2-1) °C: 650
NEMA Class: NEMA 1, 4, 4X, 6, 12, 13

**Certificates**:

SGS Fimko
Gost R

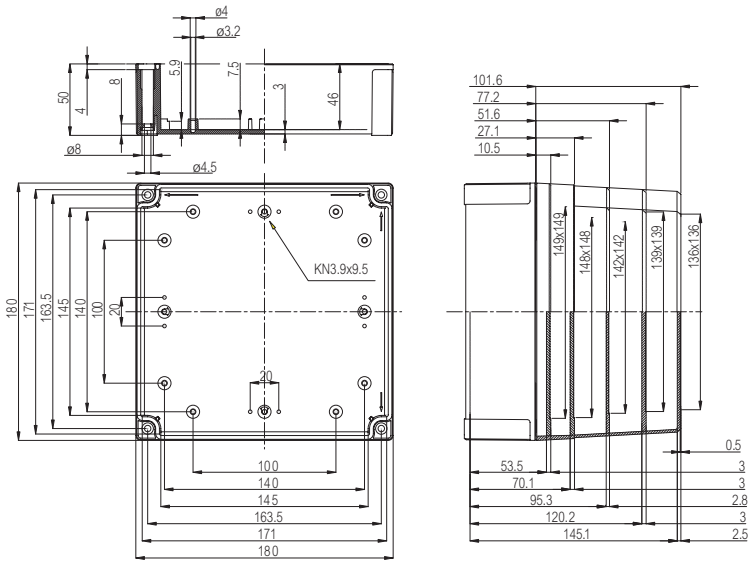


© Fibox Oy, Data subject to change without notice (printed: 11.10.2017)