


Product data sheet  
Characteristics

NSYTBP292412  
PC box IP66 IK08 RAL7035 Int.H275W225D120  
Ext.H291W241D128 opaque PC cover H20

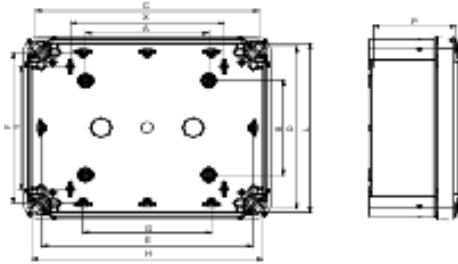

Main

|                           |  |
|---------------------------|--|
| Range                     | Thalassa   |
| Product name              | Thalassa TBP   |
| Device application        | Multi-purpose  |
| Product or component type | Industrial box                                       |
| Height                    | 291 mm   |
| Width                     | 241 mm   |
| Depth                     | 128 mm   |
| Internal height           | 275 mm   |
| Internal width            | 225 mm   |
| Internal depth            | 120 mm   |
| Enclosure mounting        | Wall mounted   |
| Device composition        | 1 x body<br>1 x cover<br>4 x cover screw             |
| Body type                 | One piece moulded                                    |
| Type of front cover       | Low plain cover                                      |
| Cover fixing              | Plastic screws                                       |
| Lock type                 | Outside sealed area : flat screwdriver captive screw |
| Removable parts           | Cover, by captive screws                             |

Complementary

|                        |                             |
|------------------------|-----------------------------|
| Material               | Polycarbonate               |
| Colour                 | Grey ( RAL 7035 )           |
| Standards              | IEC 62208<br>UL 508 A       |
| Product certifications | TÜV<br>UL<br>DEMKO<br>SEMKO |

|                                       |                              |
|---------------------------------------|------------------------------|
| Electrical insulation class           | Class II                     |
| IP degree of protection               | IP66 conforming to NEMA 4.4X |
| IK degree of protection               | IK08 conforming to IEC 62262 |
| Fire resistance                       | 960 °C                       |
| Ambient air temperature for storage   | -15...60 °C                  |
| Ambient air temperature for operation | -25...80 °C                  |

### Offer Sustainability

|                                  |   |
|----------------------------------|---|
| Sustainable offer status         | Not Green Premium product   |
| RoHS (date code: YYWW)           | Compliant - since 0940 - Schneider Electric declaration of conformity<br><a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold<br><a href="#">Reference not containing SVHC above the threshold</a>                |
| Product end of life instructions | Need no specific recycling operations   |

### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|