




DIN 934

~ISO 4032

Standard withdrawn

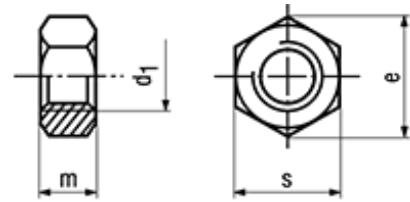

BN 628

Hex nuts ~0,8d

Stainless steel A2

- ~UNI 5588
- ~CSN 021401

i The commercial quality is class A2-70 / A4-70 (tensile strength 700 N/mm²) for M5-M24.

| Article# | d ₁ | e min. | s | m max. |
|----------|----------------|--------|-----|--------|
| 1421786 | M1 | 2,71 | 2,5 | 0,8 |
| 1421794 | M1,2 | 3,28 | 3 | 1 |
| 1421808 | M1,4 | 3,28 | 3 | 1,2 |
| 1241389 | M1,6 | 3,41 | 3,2 | 1,3 |
| 1241397 | M2 | 4,32 | 4 | 1,6 |
| 1241419 | (M2,3) | 4,88 | 4,5 | 1,8 |
| 1241427 | M2,5 | 5,45 | 5 | 2 |
| 1241435 | (M2,6) | 5,45 | 5 | 2 |
| 1241443 | M3 | 6,01 | 5,5 | 2,4 |
| 1241451 | (M3,5) | 6,58 | 6 | 2,8 |
| 1241478 | M4 | 7,66 | 7 | 3,2 |
| 1241486 | M5 | 8,79 | 8 | 4 |
| 1241494 | M6 | 11,05 | 10 | 5 |
| 8303266 | (M7) | 12,12 | 11 | 5,5 |
| 1241508 | M8 | 14,38 | 13 | 6,5 |
| 1241516 | M10 | 18,9 | 17 | 8 |
| 1241524 | M12 | 21,1 | 19 | 10 |
| 1241532 | (M14) | 24,49 | 22 | 11 |
| 1241540 | M16 | 26,75 | 24 | 13 |
| 1241559 | (M18) | 29,56 | 27 | 15 |
| 1241567 | M20 | 32,95 | 30 | 16 |
| 1241575 | (M22) | 35,03 | 32 | 18 |
| 1241583 | M24 | 39,55 | 36 | 19 |
| 1241591 | (M27) | 45,2 | 41 | 22 |

| Article# | d ₁ | e min. | s | m max. |
|----------|----------------|--------|----|--------|
| 1241605 | M30 | 50,85 | 46 | 24 |
| 1397354 | (M33) | 55,37 | 50 | 26 |
| 1129333 | M36 | 60,79 | 55 | 29 |
| 1210114 | M42 | 71,3 | 65 | 34 |