




DIN 16903 S

Standard withdrawn

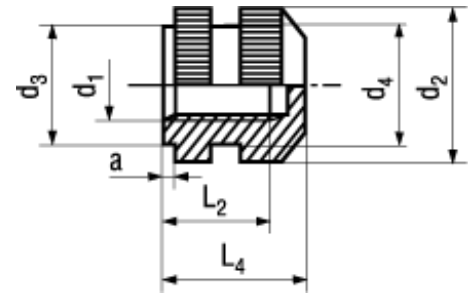

BN 1045

Threaded inserts

type S closed, long

Brass

plain

d₂: before knurling

Article#	d ₁	L ₂	L ₄	d ₂ ~	d ₃	a	d ₄
1386182	M2,5	4	6	3,8	3,8	0,8	3,4
1386204	M3	4,5	7	4,2	4,2	1	3,8
1386212	(M3,5)	5,5	8	5	5	1	4,5
1386220	M4	6	9	5,5	5,5	1	5
1386239	M5	7,5	10,8	7	7	1	6,4
1386247	M6	9	12,8	8	8	1	7,4