


## BN 11255 - ISO 14586 C

Hexalobular socket flat countersunk head tapping screws with cone end type C case-hardened

ISO 14586 C

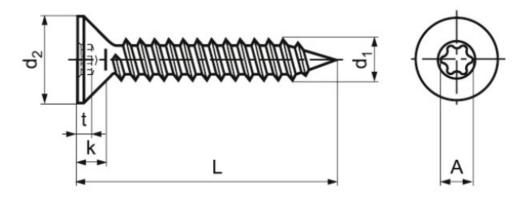

Material	Steel	Hardness	450 HV	
Surface	zinc plated blue			

Article No 3060055				
d <sub>1</sub>	ST 2,9			
L	13			
d <sub>2</sub> max.	5,5			
k max.	1,7			
hexalobular	X10			
t max.	0,91			
A~	2,8			

ISO 14586: Project

ST 2,2; ST 3,9: Not included in ISO 14586.

Countersink must be designed according to the corresponding standard!.

Screwdriver Bits 1/4" and hexalobular socket keys: BN 31518, BN 20007 and BN 14056 / CG 1.

Fasteners steel case-hardened ≥ 320 HV with electroplated coatings: Susceptible to hydrogen embrittlement!