




# uszczelnienia techniczne

Version A / SC

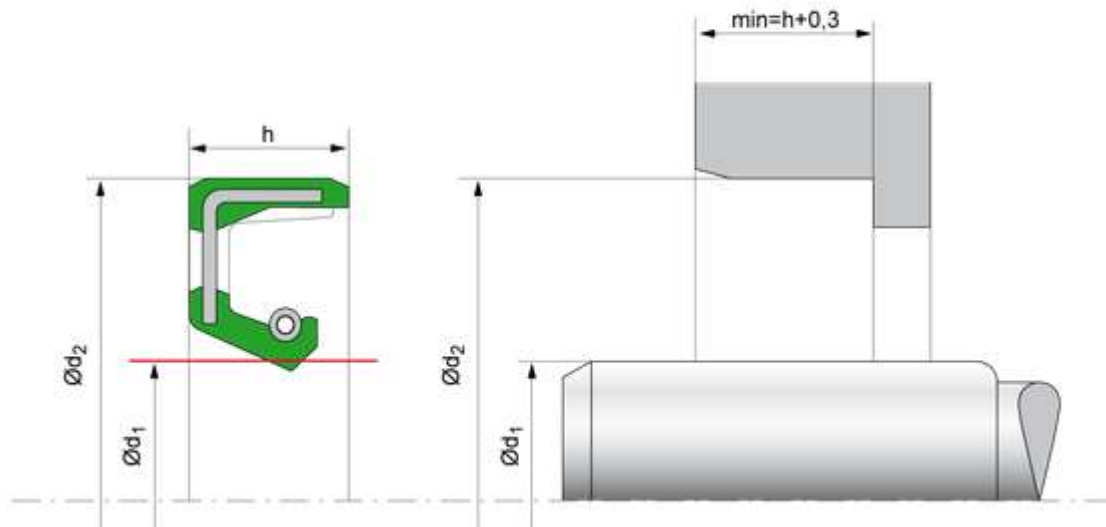

## Description:

- shaft seal.

## Materials:

- Elastomer outer jacket and self-sealing ring: NBR, SIL, FPM
- Metal stiffening insert: Non-alloy steel
- Compression spring: Non-alloy spring steel

## Hardness:

- NBR, SIL – 70 ShA
- FPM – 80 ShA

## Work parameters:

- Peripheral speed  
NBR:  $\leq 12$  m/s  
FPM:  $\leq 35$  m/s
- temperature  
NBR:  $-40^{\circ}\text{C} \div +100^{\circ}\text{C}$   
SIL:  $-60^{\circ}\text{C} \div +160^{\circ}\text{C}$   
FPM:  $-30^{\circ}\text{C} \div +200^{\circ}\text{C}$
- Pressure:  $\leq 0,05$  MPa

Symbol	d1	d2	h	Material	Version
S-4x12x6-ASC-N	4	12	6	NBR	A / SC