


BN 7 - DIN 912 - ISO 4762

Hexagon socket head cap screws
fully threaded
fully threaded

DIN 912
ISO 4762

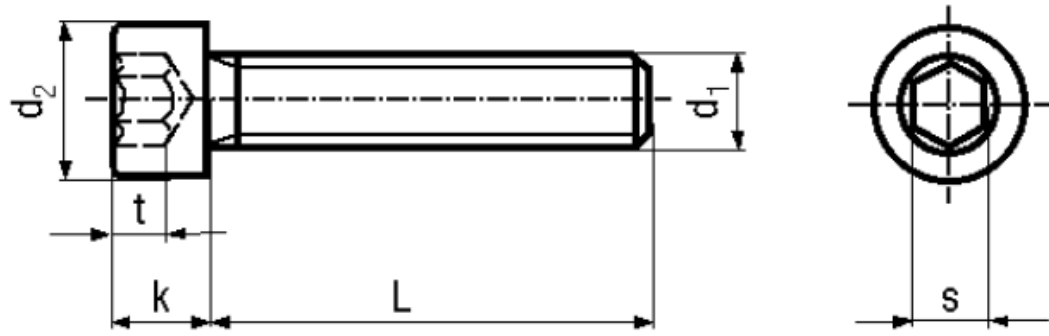

| | | | |
|----------|--------------|---------------------------|------------------------------|
| Material | Steel | Tensile strength | 1200 N/mm² |
| Surface | black | Proof stress 0,2% | 1080 N/mm² |
| Quality | 12.9 | Elongation after fracture | min. 8% |

Article No. - 1006452

| | |
|----------------|------|
| d ₁ | M2,5 |
| L | 6 |
| d ₂ | 4,5 |
| k | 2,5 |
| s | 2 |
| t min. | 1,1 |

DIN 912: Standard withdrawn

M 1.4; M18; M22; M27; M33 not included in ISO 4762.
M 2.6 not included in DIN 912 and ISO 4762.