


## BN 11

Hexagon socket head cap screws  
fully threaded  
fully threaded

DIN 912  
ISO 4762

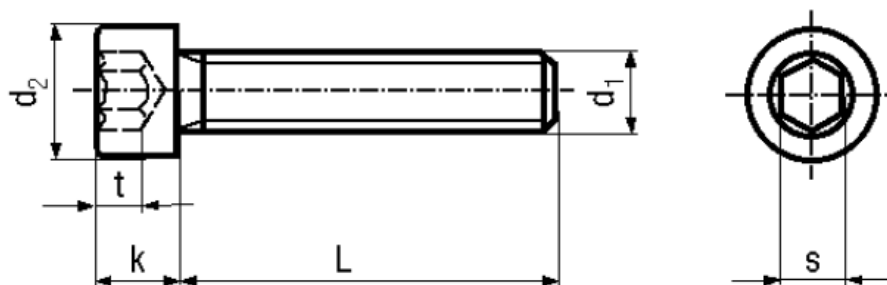

Material	<b>Steel</b>	Tensile strength	<b>1200 N/mm2</b>
Surface	<b>zinc plated blue</b>	Proof stress 0,2%	<b>1080 /mm2</b>
Quality	<b>12.9</b>	Elongation after fracture	<b>min. 8%</b>

### Article No. - 1011812

d <sub>1</sub>	M2
L	5
d <sub>2</sub>	3,8
k	2
s	1,5
t min.	1

DIN 912: Standard withdrawn

Connecting elements of classes  $\geq 10.9/10$  ( $\geq HV320$ ) are at risk from brittle fracture due to metal deposition from aqueous solutions (electroplating).

Depending on the production possibilities, they are therefore supplied from stock with an inorganic zinc coating.