


BN 11

Hexagon socket head cap screws fully threaded fully threaded

DIN 912 ISO 4762

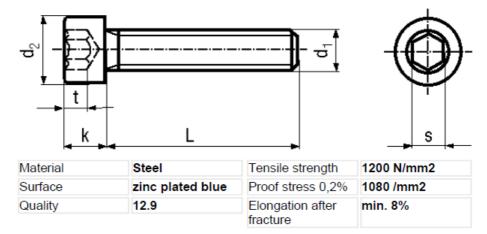

| Article No 1011960 | |
|--------------------|-----|
| d ₁ | M3 |
| L | 10 |
| d_2 | 5,5 |
| k | 3 |
| S | 2,5 |
| t min. | 1,3 |

DIN 912: Standard withdrawn

Connecting elements of classes >= 10.9/10 (>= HV320) are at risk from brittle fracture due to metal deposition from aqueous solutions (electroplating).

Depending on the production possibilities, they are therefore supplied from stock with an inorganic zinc coating.