


BN 3333

Cross recessed flat countersunk
head screws
Pozidriv Z

DIN 965 A
~ISO 7046
~UNI 7688

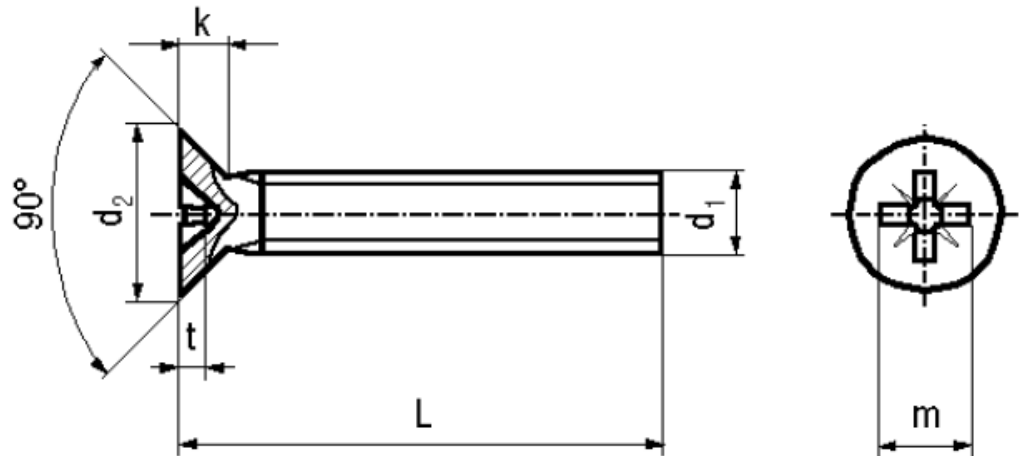

Material	Steel	Quality	4.8
Surface	zinc plated blue	Tensile strength	400 N/mm ²

Article No. - 1537237

d ₁	M6
L	10
d ₂ max.	11
k max.	3
Pozidriv	3
m~	6,1
t min.	2,46
t max.	2,92

DIN 965 A: Standard withdrawn
DIN 965 A Phillips cross recess (Type H) see BN 388, BN 8167.
All lengths fully threaded.