




ISO 14580

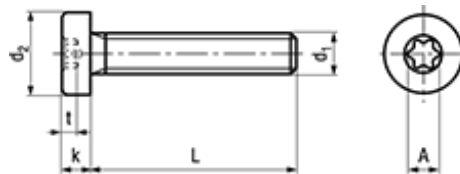

BN 15857
Hexalobular (6 Lobe) socket head cap screws
 with low head, fully threaded
 Stainless steel A2

- A2: tensile strength min. 600 N/mm²
- proof stress 0,2% min. 450 N/mm²

Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3108689	M2	3,8	1,55	X6	0,84	1,75	3
3108690							4
3108691							5
3108692							6
3108695							8
3108696							10
3108698							12
3271591							16
3108699	M2,5	4,5	1,85	X8	0,91	2,4	3
3108700							4
3108701							5
3108702							6
3108703							8
3108704							10
3108705							12
3108706							16
3108707	M3	5,5	2,4	X10	1,27	2,8	4
3108708							5
3108709							6
3108710							8
3108711							10
3108712							12
3108714							16
3108715							20

Article#	d ₁	d _{2 max.}	k max.		t max.	A~	L
3271592	M3	5,5	2,4	X10	1,27	2,8	25
3271593	M4	7	3,1	X20	1,66	3,95	5
3108717							6
3108720							8
3108723							10
3108728							12
3108729							16
3108730							20
3108731							25
3271594							30
3271595	M5	8,5	3,65	X25	1,91	4,5	6
3108732							8
3108733							10
3108734							12
3108735							16
3108737							20
3108739							25
3108741							30
3271596							35
3271597							40
3108743	M6	10	4,4	X30	2,29	5,6	8
3108745							10
3108746							12
3108747							16
3108748							20
3108749							25
3108750							30
3108751							35
3108752							40
3271598							45
3271599							50