



## SPECIAL ELECTRONIC PLIERS EUROline-Conductive

Box joint

Double leaf spring


High quality steel

Fine polished and bright burnished, for dazzle free working

Ergonomically formed bicoloured hand guard from

**dissipative** anti-slide material

The pliers of this program have been tested with good results by several testing laboratories adequate to DIN EN 61340-5-1, 61340-2-1, 61340-2-3 for work in ESD protected areas

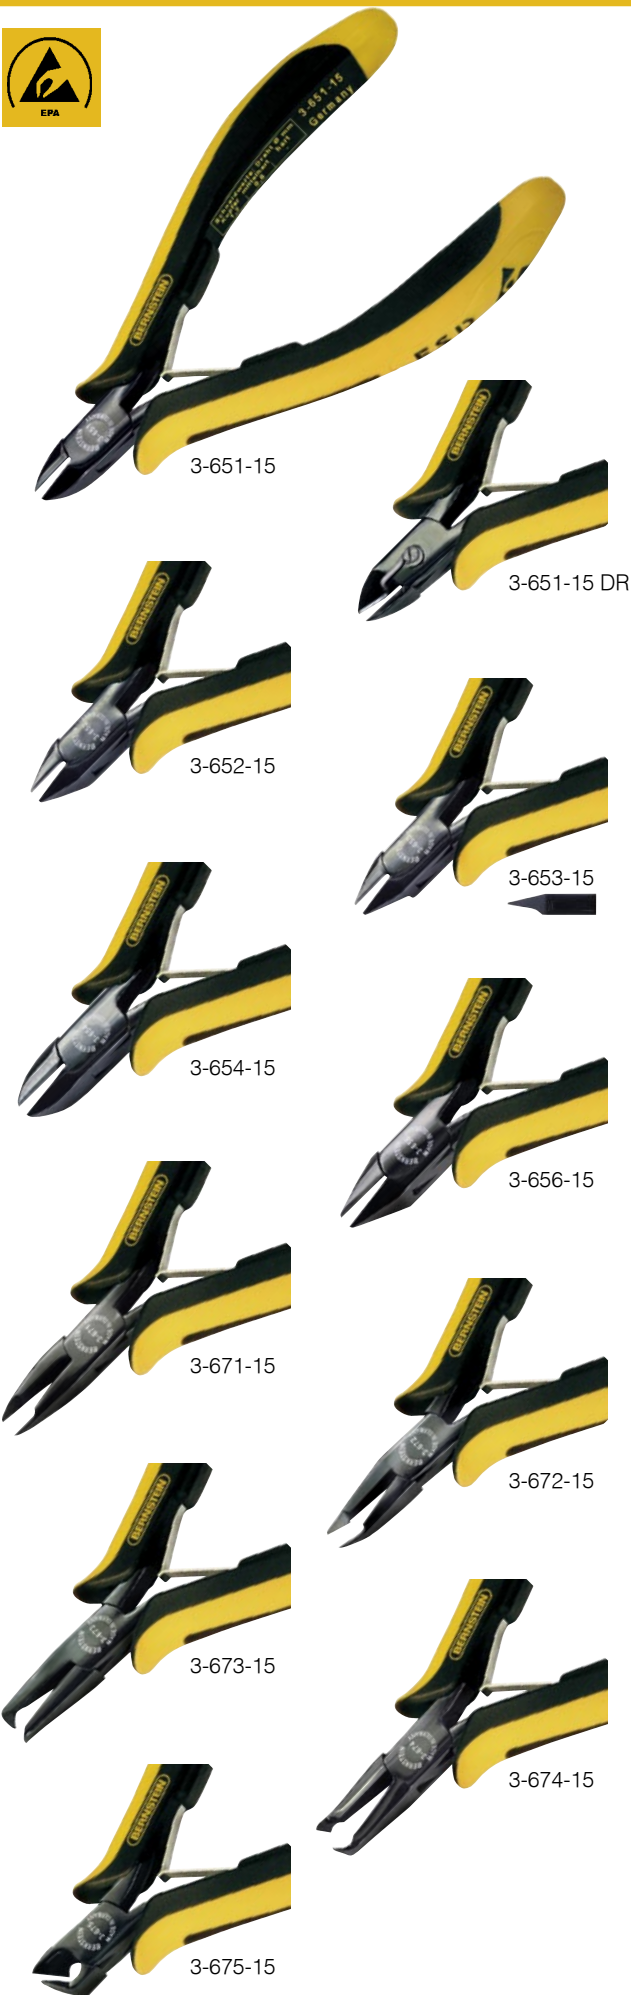

3-651-15

3-651-15 DR

3-652-15

3-653-15

3-654-15

3-656-15

3-671-15

3-672-15

3-673-15

3-674-15

3-675-15

## CUTTING PLIERS

No.	Length mm inches	Finish	cutting capacity mm Ø			Weight g
			Soft wire	Medium hard	Hard wire	

### Mini side cutters EUROline-Conductive

with very slim, rounded head for finest operations

3-651-15	120 4 3/4	without side face	1.5	0.8	-	65
3-651-15 DR	120 4 3/4	without side face, with retaining spring	1.5	0.8	-	65

### Mini side cutters EUROline-Conductive

with very slim, pointed head for finest operations

3-652-15	120 4 3/4	without side face	1.5	0.8	-	60
3-653-15	120 4 3/4	without side face, with special flat cutting edge	1.5	0.8	-	60

### Side cutters EUROline-Conductive

with slim, rounded head,

3-654-15	125 5	with side face	1.5	1.0	0.4	70
3-655-15	125 5	without side face	1.5	1.0	-	70

### Side cutters EUROline-Conductive

with slim, pointed head,

3-656-15	125 5	with side face	1.5	1.0	0.3	70
3-657-15	125 5	without side face	1.5	1.0	-	70

### End cutters EUROline-Conductive

extremely slim, without side face, for precision work at points difficult to reach

3-671-15	130 5 1/8	straight	0.8	0.6	-	65
3-672-15	130 5 1/8	cutting edge 20° angular	0.8	0.6	-	70

### Top cutters EUROline-Conductive

extremely slim, without side face, head 45° angular, for flush cutting directly in front of and behind the components.

3-673-15	130 5 1/8	cutting edge inside	0.8	0.6	-	60
3-674-15	130 5 1/8	cutting edge outside	0.8	0.6	-	60

### Oblique top cutters EUROline-Conductive

cutting plane 29° angular, flush cutting for horizontal and vertical use

3-675-15	115 4 1/2	without side face	1.2	1.0	0.4	65
----------	-----------	-------------------	-----	-----	-----	----