


5

4

3

2

1

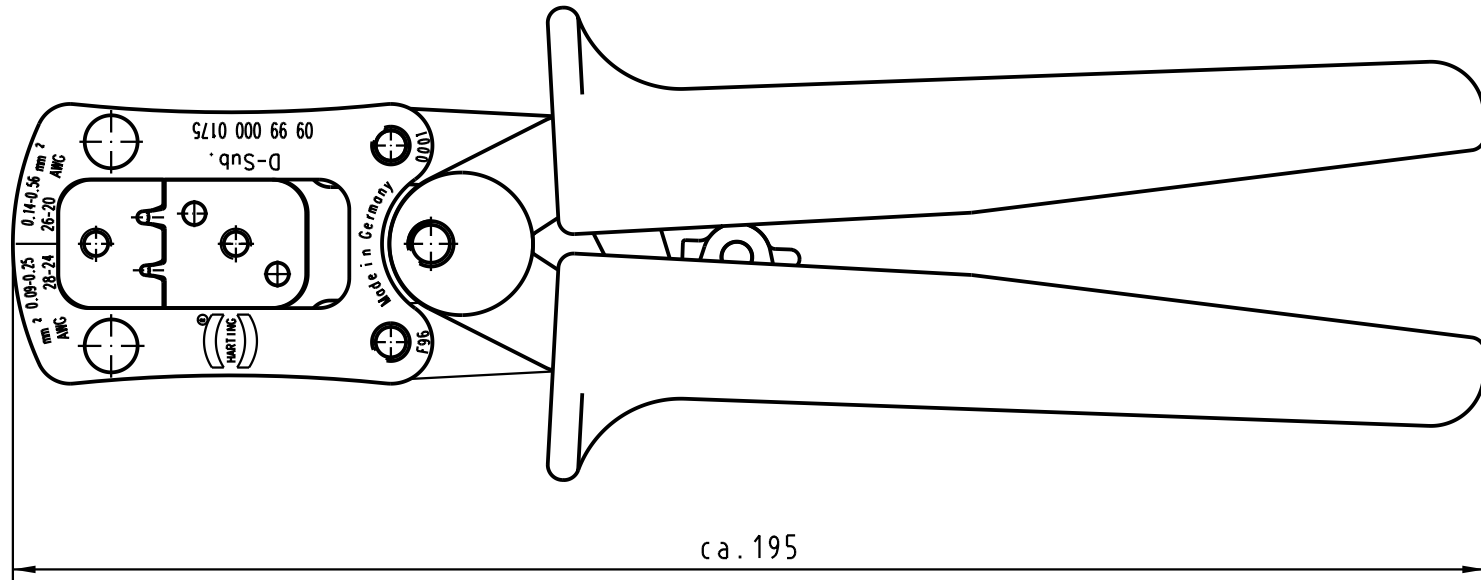

Linearer Hub
Straight action principle



Entriegelbare Zwangssperre
Ratchet release

Präzise geschliffene Profile
Precisely ground profiles

Modernste ergonomisch gestylte Softhandgriffe
Farbe: SIGNALGELB (RAL 1003)
Ergonomic soft grips, colour: yellow (RAL 1003)

Anwendungsbereich: D-SUB Kontakte
Application range: D-SUB contacts

Leiterquerschnitt: Profil 1 AWG 28-24 / Profil 2 AWG 26-20
Cross section range:

 All Dimensions in mm Original Size DIN A 4		Techn. Character.			Nicht tolerierte Maße/Free size tolerances		
Mod.	Dat.	Name	Dat.	Name	Maßstab/Scale 1:1	Crimpzange D-Sub für Einzelkont. Crimp Tool D-Sub for Single cont.	
			Detail.	09.10.01			Hage
			Insp.	09.10.01			Wae
			Stand.				
29856			HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP			TB 09 99 000 0175	
							
			Sub.			Blatt/page	

D

C

B

A