


ExStik[®] ORP Waterproof Meter

 **Flat surface electrodes provides "On-the-Spot" measurements**
With $\pm 4\text{mV}$ accuracy and high 1mV resolution

Features:

- Measures ORP from -999 to 999mV
- Automatic electronic self calibration
- Simulated analog bar graph displays change in ORP reading
- Memory stores and recalls 15 readings and saves last calibrated value
- Data validation indicators show user the reading is stabilized
- Large 3-1/2 digit (2000 count) Digital display with bar graph
- Data Hold, Auto shut-off and low battery indication
- Easy to replace electrode module is interchangeable with pH and chlorine ExStik[®] modules; (built in chip automatically recognizes the type of probe plugged in for specific measurements)
- Waterproof (IP57) design floats in water and protects the meter in wet environment
- Complete with meter and electrode, protective sensor cap, sample cup, four 3V CR-2032 batteries, and neckstrap
- Optional weighted base (EX006) holds plastic cup and ExStik[®] meter

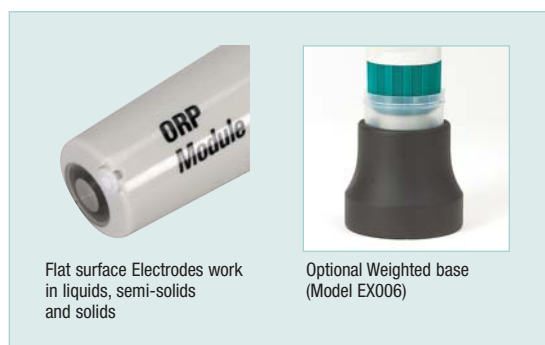

Ordering Information:

RE300	ExStik [®] ORP Meter
EX006	Weighted base with 5 solution cups
EX007	Spare sample solution cups (24pk)
CA903	Carrying case for ExStik [™] kit
RE305	Spare Probe, ORP
PH105	Spare pH ExStik [®] Electrode Module
PH115	Spare Probe, pH, Refillable Reference
CL205	Spare Probe, Chlorine
EX010	Extension Cable, 3ft (1 Meter) with probe weight for ExStik
EX050	Extension Cable, 16ft (5 Meters) with probe weight for ExStik
CA895	Carrying Case, Small with Belt Loop
EX800	ExStik 3-in-1 Kit (Chlorine, pH, Temp)
EX900	ExStik 4-in-1 Kit (Chlorine, pH, ORP, Temp)

Specifications	
ORP (mV)	999 to 999mV
Resolution	1mV
Accuracy	$\pm 4\text{mV}$
Power	four SR44W button batteries
Dimensions	1.4 x 6.8 x 1.6" (35.6 x 172.7 x 40.6mm)
Weight	3.85oz (110g)

