



**LED Power Supply Constant Voltage**

<b>Model</b>	<b>LNI15012CV</b>
Voltage	12V
Current	12.5A
Power	150W







<b>Input</b>	Rated input voltage	230 VAC
	Range of input voltage	220-240VAC
	Frequency	50Hz
	Power Factor	>0.9@Full Load, 240VAC
	Current	0.9 A MAX. @Full Load
	Start-Up time	<0.5S for ERP @Full Load
	Inrush Current	100A MAX. @Full Load. 240 VAC
	Unload Power Consumption	≤1W
<b>Output</b>	Unload voltage	12.6VDC MAX
	Load Voltage rang	11.4-12.6V DC
	Constant Voltage	12V
	Voltage Accuracy	±5% @220-240VAC
	Voltage Regulation	≤3%@Full Load
	Hold-up Time	<1s max,Io=0mA
	Efficiency in full load	≥90%@Full Load ,240VAC
	Ripple	NA
Power Max	150W	
<b>Dimming</b>	Dimmable or not	NA
	Dimming mode	NA
	Dimming current range	NA
<b>Protection</b>	Over load Protection	105-150% Protection type: Auto Restore
	Over Voltage Protection	>16VDC Protection type: Auto Restore
	Short circuit Protection	Protection type: Auto Restore
	Over Temperature protection	Protection type: Auto Restore
	HI-pot	Input-Output(V.AC)
<b>Isolation</b>	Input-FG(V.AC)	NA
	Output-FG(V.AC)	NA
	Leakage Current	<0.5mA(240VAC)
<b>Environment/Life</b>	Input-Output(V.AC)	≥10MΩ@500VDC
	Input-FG(V.AC)	NA
	Output-FG(V.AC)	NA
	Operating Temperature	-10°C...+40°C
	tc	85°C
<b>Feature</b>	Storage Temperature	-20°C...+60°C
	Humidity	20%-90%RH
	Life time	>30,000h @50°C
	HSF requirement	RoHS
<b>Safety @ EMC</b>	Dmension	200.5*71*34.5(LXWXH)cm
	Approval	CE
	Safety standards	EN 61347-1; EN61347-2-13 EN60598-1; EN60598-2-6
	EMI	EN55015; EN61000-3-2 Class C EN61000-3-3
	EMS	EN61547; EN 61000-4-2 - 8KV; 4KV Performance Criteria B EN 61000-4-5 —1000V; Performance Criteria C

LED Power Supply Constant Voltage	
Model	LNI15012CV
Voltage	12V
Current	12.5A
Power	150W

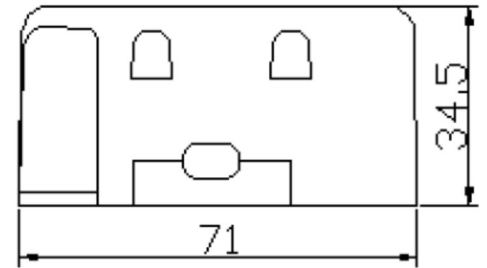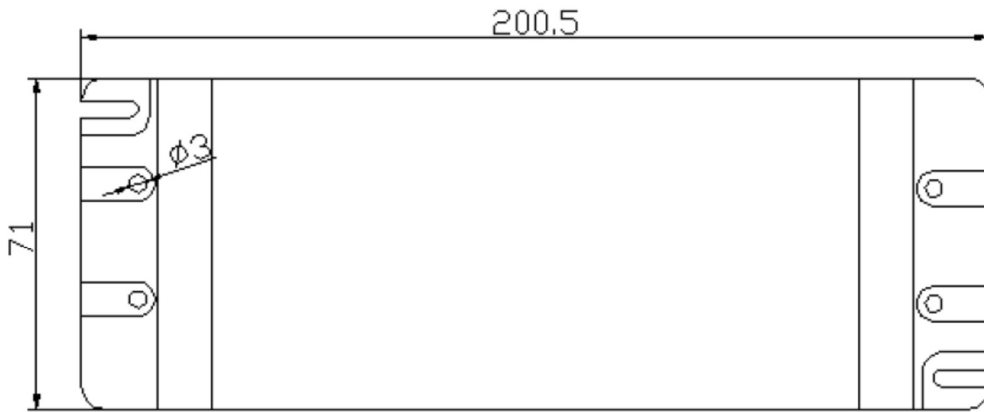

**LABEL:**

<b>ESPE</b> 		LED POWER SUPPLY LNI15012CV
N	INPUT.....230V~ 50Hz 0.9A	Constant Voltage
L	OUTPUT.....12V=12.5A	+
	$\lambda \geq 0.9$ $t_c: 85^\circ\text{C}$ $t_a: 40^\circ\text{C}$ • $t_c$	-
		-
		-
	IP20 <b>CE</b> 	+
		+