


EMI Filters, Three Phase, KEMET, FLLD4-TH, 530 VAC, 36 A, 130x125x115mm

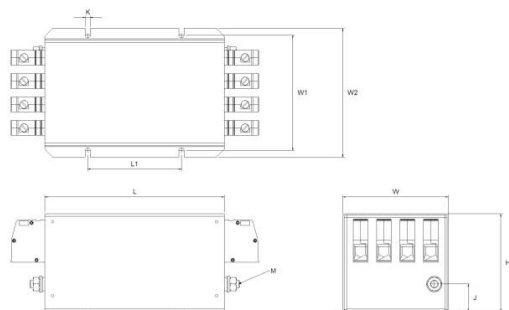

| Dimensions | |
|------------|-------------------|
| L | 130mm NOM |
| W | 125mm NOM |
| H | 115mm NOM |
| L1 | 90mm NOM |
| W1 | 137.5mm NOM |
| W2 | 153mm NOM |
| J | 32mm NOM |
| K | 6.5mm NOM |
| M (Earth) | Threaded Studs M6 |

| Packaging Specifications | |
|--------------------------|--------|
| Packaging: | Bulk |
| Packaging Quantity: | 1 |
| Weight: | 1.2 kg |

| General Information | |
|---------------------|------------------------------------|
| Style: | Chassis Mount |
| Series: | FLLD4-TH |
| Description: | EMI Filter, Classis Mount, Compact |
| Features: | High Performance |
| RoHS: | Yes |
| Approvals: | IEC/EN 60939, UL 1283 |

| Specifications | |
|---------------------------|------------------|
| Voltage AC: | 530/305 VAC |
| Rated Frequency: | 50-60 Hz |
| Current: | 36 A (50C) |
| Rated Temperature: | 50C |
| Temperature Range: | -25/+100C |
| Climate Category: | 25/100/21 |
| Test Voltage DC (P to P): | 2250 VDC |
| Test Voltage DC (P to E): | 3000 VDC |
| Power Loss: | 15 W (25C 50 Hz) |
| Leakage Current: | 11 mA |