

Product Search Data Sheet

Note: This datasheet may be out of date

Please download the latest datasheet of BLM15HB121SN1# from the official website of Murata Manufacturing Co., Ltd.


https://www.murata.com/en-eu/products/productdetail?partno=BLM15HB121SN1%23

BLM15HB121SN1#

"#" indicates a package specification code.

In Production RoHS REACH

< List of part numbers with package codes > BLM15HB121SN1J BLM15HB121SN1B BLM15HB121SN1D

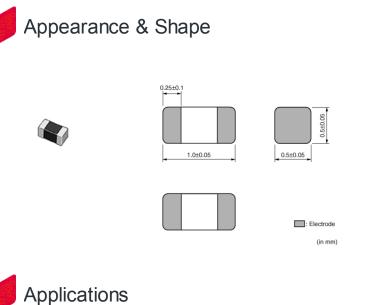



- 1. Small size: 1.0x0.5mm
- 2. Suitable for noise suppression in 1GHz or higher frequency
- 3. No Lead production using Ni+Sn plating in termination

Applications

- 1. EMI suppression for Note PC and DSC
- 2. Noise suppression for data line in mobile phone
- 3. Noise suppression for USB interface line in mobile phone
- 4. Prevention of erroneous operation caused by local oscillation signal in mobile phone

Other Usage

Packaging Information

For general

Packaging	Specifications	Minimum Order Quantity
J	330mm Paper Tape	50000
В	Bulk(Bag)	1000
D	180mm Paper Tape	10000

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Note: This datasheet may be out of date

Please download the latest datasheet of BLM15HB121SN1# from the official website of Murata Manufacturing

Co., Ltd. https://www.murata.com/en-eu/products/productdetail?partno=BLM15HB121SN1%23

BLM15HB121SN1#

"#" indicates a package specification code.

Specifications

Shape	SMD	Number of Circuit	1
Size Code (in mm)	1005		
Length	1.0mm		
Length Tolerance	±0.05mm		
Width	0.5mm		
Width Tolerance	±0.05mm		
Thickness	0.5mm		
Thickness Tolerance	±0.05mm		
Impedance (at 100MHz)	120Ω		
Impedance (at 100MHz) Tolerance	±25%		
Impedance (at 1GHz)	500Ω		
Impedance (at 1GHz) Tolerance	±40%		
Rated Current (at 85°C)	300mA		
Rated Current (at 125°C)	300mA		
DC Resistance(max.)	0.7Ω		
Operating Temperature Range	-55℃ to 125℃		
Mass(typ.)	0.001g		

2 of 3

Attention 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Product Search Data Sheet


Note: This datasheet may be out of date. Please download the latest datasheet of BLM15HB121SN1# from the official website of Murata Manufacturing

Co., Ltd. https://www.murata.com/en-eu/products/productdetail?partno=BLM15HB121SN1%23

BLM15HB121SN1#

"#" indicates a package specification code.



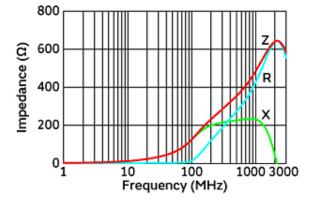

(Resistance element becomes dominant at high frequencies.)

Impedance-Frequency Characteristics

Equivalent Circuit

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

3 of 3