

Product Search Data Sheet

Note: This datasheet may be out of date.

Please download the latest datasheet of BLM21BD222SN1# from the official website of Murata Manufacturing Co., Ltd.

https://www.murata.com/en-eu/products/productdetail?partno=BLM21BD222SN1%23

BLM21BD222SN1#

"#" indicates a package specification code.


Features

match signal frequency.

In Production RoHS REACH

< List of part numbers with package codes > BLM21BD222SN1K BLM21BD222SN1B BLM21BD222SN1L

Appearance & Shape

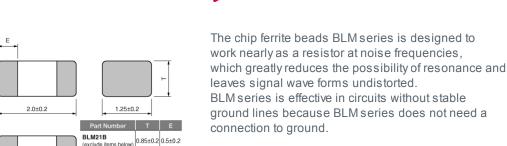

BLM21BD222S 1 1.25±0.2 0.5±0.2

BLM21BD272S 1 1.25±0.2 0.3±0.2

Electrode (in mm)





The nickel barrier structure of the external electrodes provides excellent solder heat resistance.

characteristics. Various impedances are available to

BLM_B series can minimize attenuation of the

signal waveform due to its sharp impedance

Other Usage For general

Packaging Information

Packaging	Specifications	Minimum Order Quantity
К	330mm Embossed Tape	10000
В	Bulk(Bag)	1000
L	180mm Embossed Tape	3000

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Note: This datasheet may be out of date

Please download the latest datasheet of BLM21BD222SN1# from the official website of Murata Manufacturing

Co., Ltd. https://www.murata.com/en-eu/products/productdetail?partno=BLM21BD222SN1%23

BLM21BD222SN1#

"#" indicates a package specification code.

Specifications

Shape	SMD
Size Code (in mm)	2012
Size Code (in inch)	0805
Length	2.0mm
Length Tolerance	±0.2mm
Width	1.25mm
Width Tolerance	±0.2mm
Thickness	1.25mm
Thickness Tolerance	±0.2mm
Impedance (at 100MHz)	2250Ω
Impedance (at 100MHz) Tolerance	(Тур.)
Rated Current (at 85°C)	250mA
Rated Current (at 125°C)	250mA
DC Resistance(max.)	0.6Ω
Operating Temperature Range	-55℃ to 125℃
Mass(typ.)	0.014g
Number of Circuit	1

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance onlice. Please check with our sales representatives or product engineers before ordering

without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Product Search Data Sheet

Note: This datasheet may be out of date


Please download the latest datasheet of BLM21BD222SN1# from the official website of Murata Manufacturing Co. Ltd.

Co., Ltd. https://www.murata.com/en-eu/products/productdetail?partno=BLM21BD222SN1%23

BLM21BD222SN1#

"#" indicates a package specification code.

Product Data

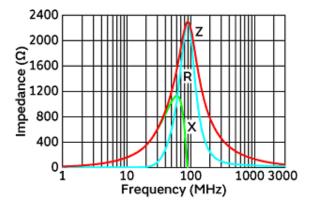

(Resistance element becomes dominant at high frequencies.)

Impedance-Frequency Characteristics

Equivalent Circuit

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

3 of 3