



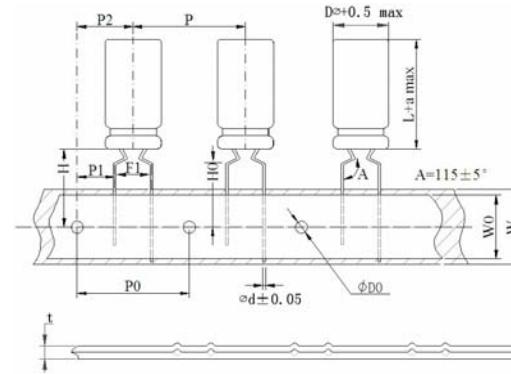

Aluminum Electrolytic Capacitor

Customer	TME	SERIES	PF	NO.:521-770183	PUBLISH DATE	2017-7-13
----------	-----	--------	----	----------------	--------------	-----------

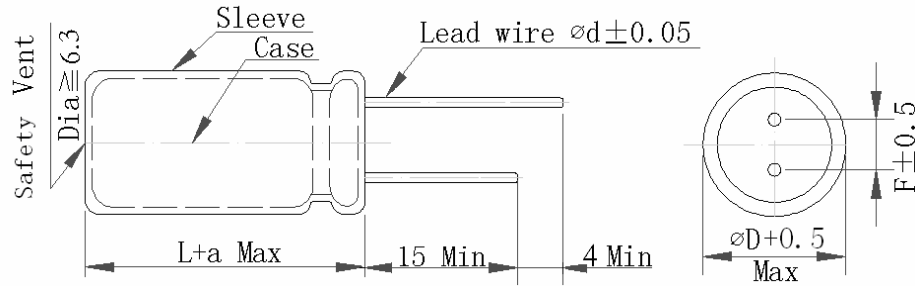

Unit(mm):

- P=12.7±1.0 H0=16.0±0.5
- P0=12.7±0.2 W =18.0±0.5
- P1=3.85±0.5 W0=12.5MIN
- P2=6.35±1.0 ΦD0=4.0±0.2
- F1=5.0+0.8/-0.2 H=18.5±0.5
- t=0.7±0.2

Original

FIG-1

No.	ELITE Part No.	Customer Part No.	Capacitance (uF)	Tolerance on rated Capacitance (%)	Working Voltage (Vdc)	Surge Voltage (Vdc)	Category Temp. Range (°C)	Tanδ @25°C (120Hz) (Max)	Leakage Current (uA) (2 min.)	Rated Ripple Current (mA rms) @105°C 120Hz	Endurance @ 105°C (Hours)	Dimensions (mm)					Appearance Drawing No
												ΦD	L	a	Φd	F1	
1	PF1A471MP508B5	N/A	470	± 20	10	13	-40 ~ +105	0.22	47	330	2000	8	11.5	1.5	0.6	5.0	FIG-1

※Test leakage current before testing dissipation factor and capacitance during the electric characteristic test.

REMARKS:	APPROVED BY	CHECKED BY	PREPARED BY
Sleeve Color : Black.			