


Film, Film/Foil Polypropylene, Motor Run, C276, 25 uF, 5%, 450 V

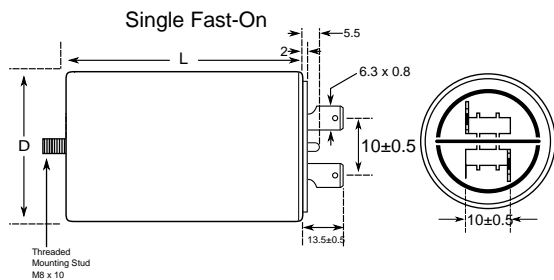

General Information	
<b>Dielectric:</b>	Film/Foil Polypropylene
<b>Style:</b>	Can
<b>Series:</b>	C276
<b>Description:</b>	Plastic Case and Cover, Ultra Sonically Welded Seal
<b>Features:</b>	Ultra Sonically Welded Seal, Safety Class P0, UL_94 V0 Disk
<b>RoHS:</b>	Yes
<b>Lead:</b>	Fast On (1+1)
<b>Approvals:</b>	UL, VDE, UL (Construction Only), UL_94 V0 Disk

Dimensions	
<b>D</b>	45mm +1mm
<b>L</b>	74mm +/-2mm

Packaging Specifications	
<b>Mounting:</b>	Bolt - M8x10
<b>Packaging:</b>	Bulk

Specifications	
<b>Capacitance:</b>	25 uF
<b>Capacitance Tolerance:</b>	5%
<b>Voltage AC:</b>	450 VAC
<b>Temperature Range:</b>	-25/+85C
<b>Rated Temperature:</b>	85C
<b>Max dVdt:</b>	15 V