


Film, Metallized Polypropylene, DC Link, C4DE, 100 uF, 10%, 1,000 V

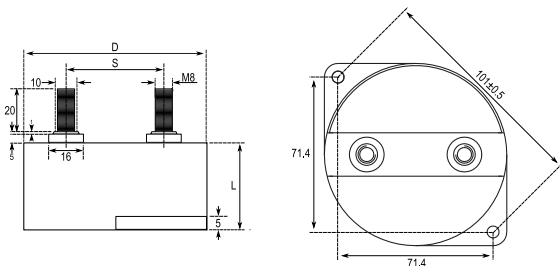

Dimensions	
D	84mm +/-0.5mm
L	64mm +/-2mm
S	45mm +/-1mm
LL	20mm NOM

Packaging Specifications	
Mounting:	Flange Mount
Packaging:	Bulk
Packaging Quantity:	12

General Information	
Dielectric:	Metallized Polypropylene
Style:	Can
Series:	C4DE
RoHS:	Yes
Lead:	Threaded Studs M8
Miscellaneous:	32 Amps (10kHz, 85C)

Specifications	
Capacitance:	100 uF
Capacitance Tolerance:	10%
Voltage DC:	1000 VDC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Max dVdt:	27 V
Resistance:	1.3 mOhms (10kHz)
Current:	86 Amps (10kHz 25C), 72 Amps (10kHz 45C), 56 Amps (10kHz 65C)
Inductance:	40 nH